



DURA



Food Grade Moisture Resistant

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission clear or opal panel
- Tridonic or Philips LED modules and drivers
- Rear access as standard for ease of maintenance and suitable for walk on ceilings
- Front access available for alternative applications
- Bespoke/project specific sizes and outputs made to order
- An ingress protection of up to IP65 from below the ceiling
- Wireless option available
- Optiona LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

PRODUCT CODE

Product	CNP	Dura
Access	R	Rear Access
	F	Front Access
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output	12	12000 Lumens
	14	14000 Lumens
	16	16000 Lumens
	18	18000 Lumens
	21	21000 Lumens
	24	24000 Lumens
	28	28000 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
	-	No Emergency
	EL	3 Hour Emergency
	EX	3 Hour Emergency High Output
Emergency	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
	Diffuser	OP
CL		Clear

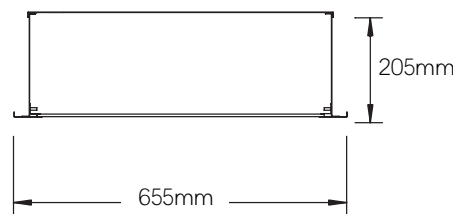

Ambient operating temperature 25°C

