


ROKKO Geometrical Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Available in a variety of bespoke geometric shapes and sizes such as pentagon, heptagon, decagon etc
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

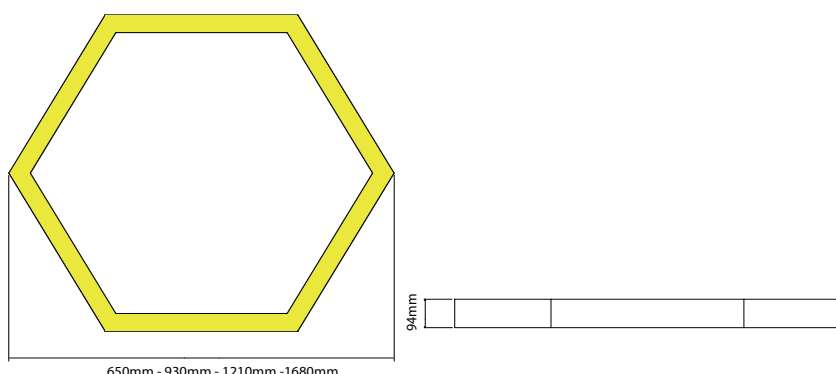

Ambient operating temperature 25°C

PRODUCT CODE

Product	ROK	Rokko Pendant
Body Size	06	650mm
	09	930mm
	12	1210mm
	16	1680mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output	03	3800 Lumens
	06	6300 Lumens
	05	5900 Lumens
	09	9600 Lumens
Output	07	7700 Lumens
	12	12600 Lumens
Output	09	9800 Lumens
	16	16100 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Colour Rendering	S	Ra80
	N	Ra90
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent

