




## EMFROG MINI

### Mini Frog Emergency

- Polycarbonate body with adjustable twin lenses
- Open Area lens as standard
- Optional corridor lens
- Colour temperature 5000K
- 3 hour maintained or non maintained emergency operation
- Suitable for ceiling and wall mounting
- Optional track mounting with Global 3 phase adapter
- Complies with EN60598.2.22
- IP20

#### PRODUCT CODE

Product	EMFROG	Frog Mini Emergency
Mounting	SF	Surface Mount
	TM	Track Mounted
Beam	OA	Open Area
	CO	Corridor
	W	White
	B	Black

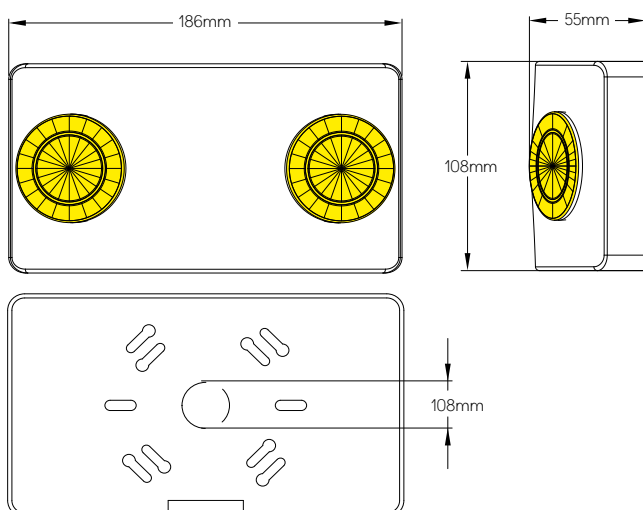

Ambient operating temperature 25°C

