




EMPIRE High Output High/Low Bay

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- Choice of lens for either rack or high open areas delivering unrivalled uniformity
- Tridonic or Philips LED modules and drivers
- Slim, linear, specification grade luminaire providing exceptional efficacies of over 160 luminaire lumens per watt
- Various additional mounting brackets available
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

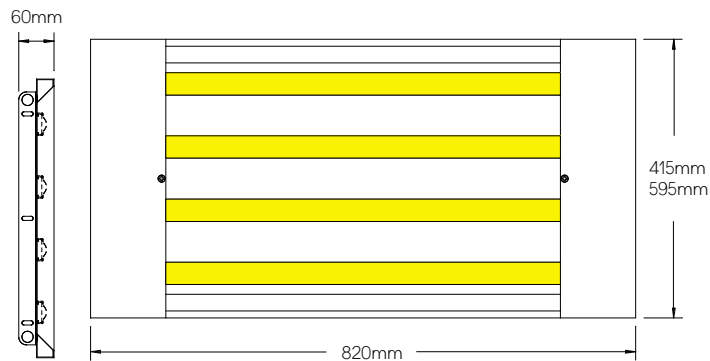

Ambient operating temperature 25°C

PRODUCT CODE

Product	EP	Empire
Body Size	4	415mm (12-24)
	6	595mm (28-36)
	8	595mm (37-48)
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output	T	Touch Dimming Driver
	12	12200 Lumens
	14	13600 Lumens
	16	15900 Lumens
	18	18300 Lumens
	21	20800 Lumens
	24	23800 Lumens
	28	27500 Lumens
	31	31200 Lumens
	33	32800 Lumens
Colour Temperature	36	35800 Lumens
	37	36700 Lumens
	40	39300 Lumens
	42	41600 Lumens
	46	45700 Lumens
	48	47700 Lumens
	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No Sensor
	TS	Thumb Sensor
	PL	PIR Low (up to 3.5m)
	PM	PIR Mid (up to 12m)
	PH	PIR High (up to 16m)
Emergency	-	No Emergency
	EL	3 Hour Emergency
	EX	3 Hour Emergency High Output
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency Dali EM Pro
	LM	Lithium Emergency
Diffuser	NB	60° (narrow beam)
	MB	90° (medium beam)
	OP	Opal
Body Colour	W	White
	B	Black

