

ROGUE CHILL


Low Temperature High/Low Bay

MANUFACTURING IN THE
UNITED KINGDOM

- Specifically developed to be used in chiller / cold store environments where protection from temperatures down to -30°C is required
- Body constructed from powder coated steel
- The polycarbonate diffuser is set within the powder coated frame which is retained into the body via screw fixings
- Aluminium high output reflectors
- Narrow or medium beam lenses available
- Exceptional efficacies of up to 155 luminaire lumens per watt
- This luminaire also utilises a special paint process to ensure ultimate protection
- Various additional mounting brackets available
- IP65 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

PRODUCT CODE

Product	ROGX	Rogue Chill	
Body Size	4	535mm (12-24)	
	6	535mm (28-36)	
	8	655mm (37-48)	
Driver	S	Standard Driver	
	D	Dali Driver	
	T	Touch Dimming Driver	
Output	12	12200 Lumens	
	14	13600 Lumens	
	16	15900 Lumens	
	18	18300 Lumens	
	21	20800 Lumens	
	24	23800 Lumens	
	28	27500 Lumens	
	31	31200 Lumens	
	33	32800 Lumens	
	36	35800 Lumens	
	37	36700 Lumens	
	40	39300 Lumens	
Colour Temperature	3	3000 Kelvin	
	4	4000 Kelvin	
	Sensor	MW	Microwave (up to 12m) non dim
		PH	PIR High (up to 16m)
	Emergency	-	No Emergency
		RE	Remote Emergency
Diffuser	CL	Clear	
	OP	Opal	
	NB	60° (narrow beam)+Clear	
	MB	90° (medium beam)+Clear	
Body Colour	W	White	
	B	Black	

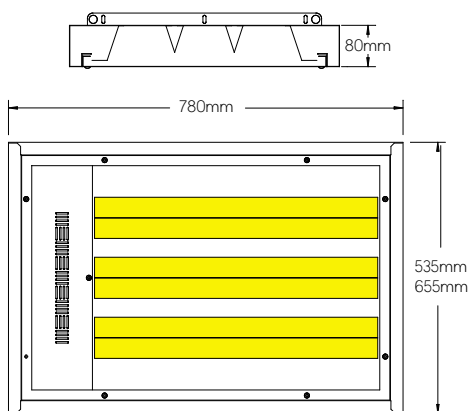

Ambient operating temperature 25°C

