


SHARD Triangular Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke/project specific sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

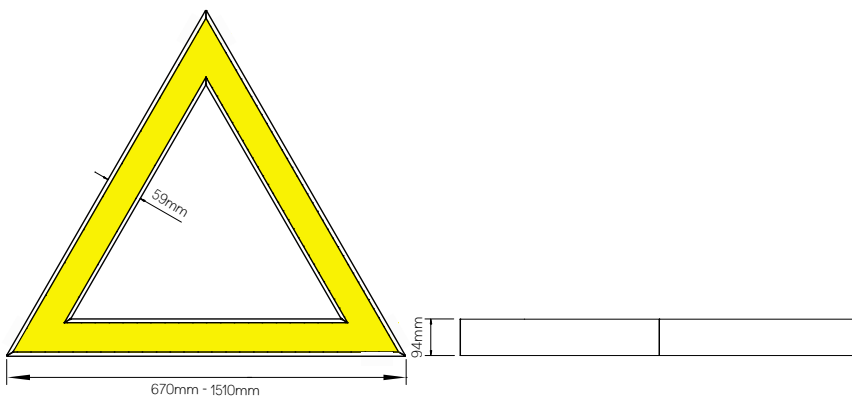

Ambient operating temperature 25°C



PRODUCT CODE		
Product	SHA	Shard Pendant
Body Size	07	670mm
	08	810mm
	12	1230mm
	15	1510mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (670mm)	06	6300 Lumens
	10	10000 Lumens
Output (810mm)	08	7900 Lumens
	13	12500 Lumens
Output (1230mm)	13	12600 Lumens
	20	20000 Lumens
Output (1510mm)	16	15800 Lumens
	25	25000 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Colour Rendering	S	Ra80
	N	Ra90
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent