## contrac L i g h t i n g






## UNIVERSAL Recessed

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Suitable for 15mm/25mm T & plasterboard ceiling types as standard
- Consealed T ceiling option
  available



- Bespoke/project specific sizes and outputs made to order
- Various powder coated finishes
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- IP20 rated
- 5 year warranty on LED system

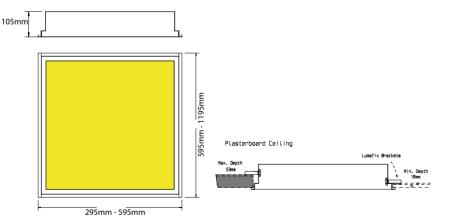

2		2	-	-	~	XX		~	1				11		
1		T	X				T	T			1 ALA	1	2	-	THE OWNER WATER OF THE OWNER OWNER OF THE OWNER OWNE
B	ā	ā	Ē	1	i i	i	 	-	1	1		-	1	2	
												1			



	PR	ODUCT CODE
Product	UM	Universal
	66	595mm X 595mm
Body Size	123	1195mm X 295mm
	126	1195mm X 595mm
	S	Standard Driver
	D	Dali Driver
Driver	W	Wireless Dim
	Α	1-10V Driver
	Т	Touch Dimming Driver
Output	03	3000 Lumens
(66)	04	4000 Lumens
Output (123)	05	5000 Lumens
(123)	06	6000 Lumens
	06	6000 Lumens
Output	08	8000 Lumens
(126)	10	10000 Lumens
	12	12000 Lumens
Colour	3	3000 Kelvin
Temperature	4	4000 Kelvin
	-	No Sensor
Sensor	PR	Pir Sensor
	MW	Microwave Sensor
	-	No Emergency
	EL	3 Hour Emergecny Pack
Emergency	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency Dali EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
Diriusei	MP	Microprism
	W	White
Body Colour	В	Black
body Colour	S	Silver
	0	Other/Specified

Ambient operating temperature 25°C - Do not cover back of fitting

