


MERIDIAN system Suspended & Surface System Connectors

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium housing
- Lit corner & T section
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Adjustable 3m drop wire suspension kit
- Multiple coloured diffuser inserts available
- Continuous run lighting system
- Downlight only or up/downlight
- Infill blanking panels optional
- Bespoke/project specific sizes and outputs made to order
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- 5 year warranty on LED system
- Recessed version available

PRODUCT CODE		
Product	MSPC	Meridian Suspended
	MSFC	Meridian Surface
Distribution	D	Downlight Only
	U	Uplight / Downlight*
Configuration	L	90° connector 605mmx605mm
	T	T connector 565mmx605mm
Driver	S	Standard
	D	Dali
	W	Wireless Dim
	A	1-10V
Output (downlight only)	04	4000 Lumens
	06	6000 Lumens*
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified

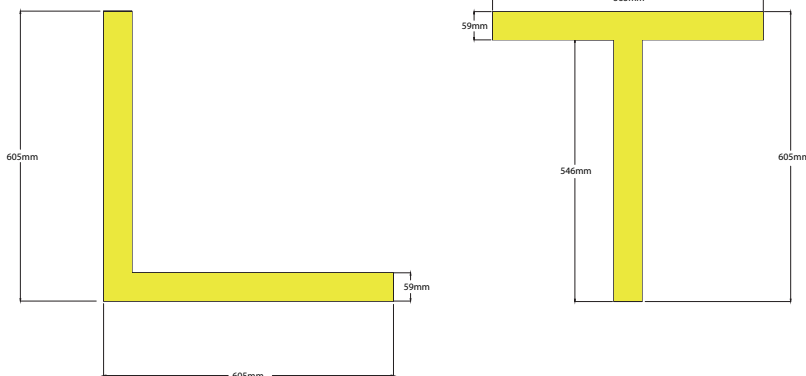

* Suspended option only

Ambient operating temperature 25°C

