





BASE Circular Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic LED modules and drivers
- Bespoke outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- Optional ceiling mounting point
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

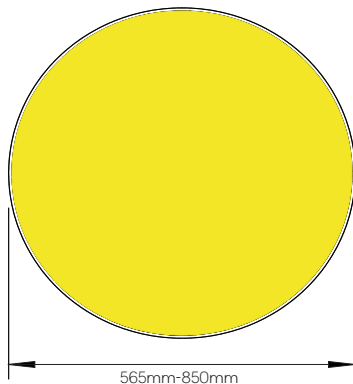

PRODUCT CODE		
Product	BAS	Base Pendant
Body Size	06	565mm
	09	850mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (565mm)	T	Touch Dimming Driver
	04	4200 Lumens
	06	6000 Lumens
	08	7900 Lumens
Output (850mm)	07	7200 Lumens
	09	9000 Lumens
	12	12100 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent

Optional Single Point Ceiling Mounting Kit

Product	SK010	Ceiling mounting rose with terminal and 3 wire adjustable suspension kit
---------	-------	--

Ambient operating temperature 25°C

