
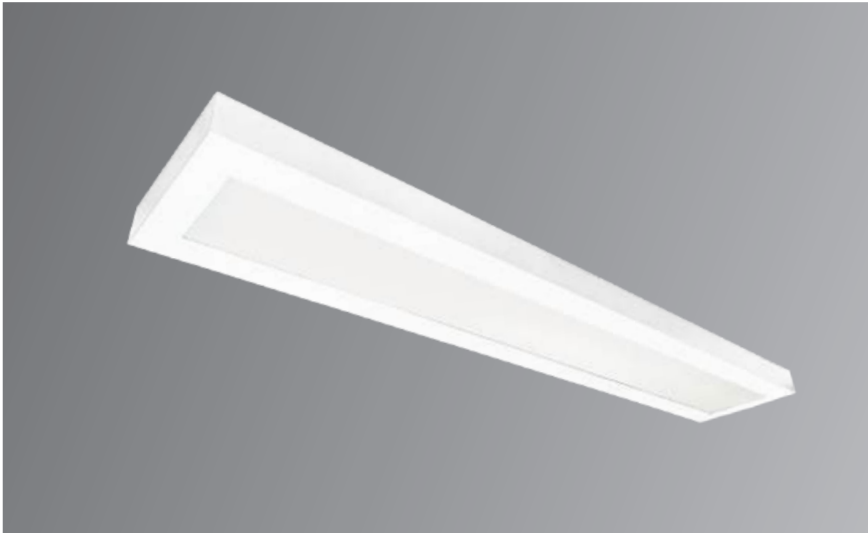



BLOK

Surface or Suspended Linear

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Stand-alone or continuous run lighting system
- Downlight only or up/downlight
- High colour rendering CRI>80
- High colour consistency 3 step MacAdam
- Bespoke sizes, shapes and outputs made to order
- Corner section made to order
- Various powder coated finishes
- Infill blanking panels optional
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

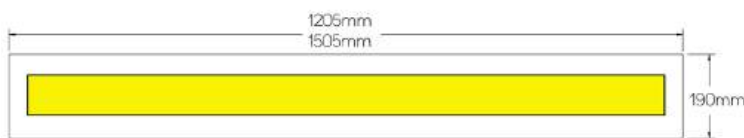

Ambient operating temperature 25°C

*Surface mounted **SF** diffusers and infill blanking panels are lay in, lift and tilt mounted.

PRODUCT CODE

Product	BL	Blok Linear
Distribution	D	Downlight Only
	U	Uplight / Downlight
Mounting	SP	Suspended Mount
	SF	Surface Mount*
Body Size	12	Length (1205mm)
	15	Length (1505mm)
Configuration	SA	Stand-alone
	CC	Continuous Centre
	CS	Continuous Start
	CE	Continuous End
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output Opal 1205mm	04	4200 Lumens
	06	6200 Lumens
	07	6900 Lumens
	08	8100 Lumens
Output Opal 1505mm	06	6300 Lumens
	08	8200 Lumens
	09	9400 Lumens
	10	10200 Lumens
Output MP 1205mm	03	3000 Lumens
	04	4200 Lumens
	05	5000 Lumens
	06	6200 Lumens
Output MP 1505mm	04	4300 Lumens
	05	5200 Lumens
	06	6300 Lumens
	07	7300 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No Sensor
	PR	PIR Sensor
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser*	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified