


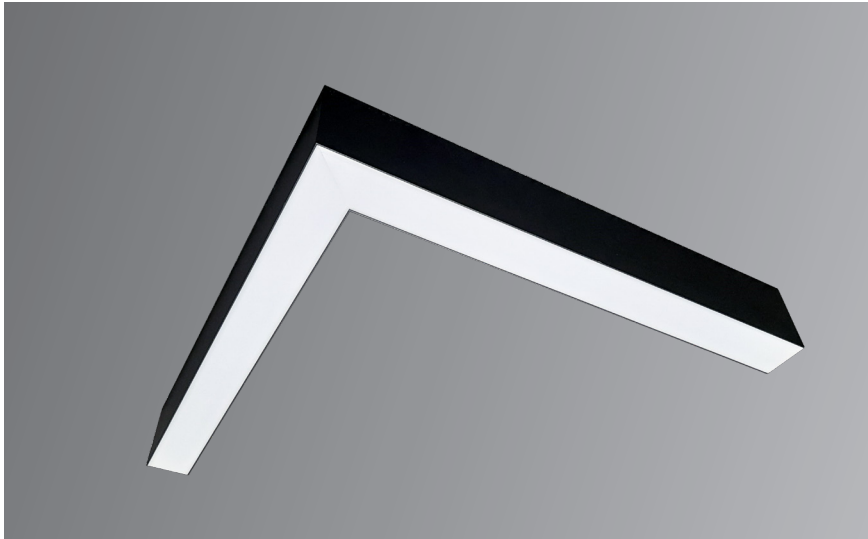


CHEVRON Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke/project specific sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

PRODUCT CODE		
Product	CHE	Chevron Pendant
Body Size	05	560mm
	08	860mm
	12	1260mm
	16	1650mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (560mm)	02	2600 Lumens
	04	3800 Lumens
Output (860mm)	04	4200 Lumens
	06	6100 Lumens
Output (1260mm)	06	6300 Lumens
	09	9100 Lumens
Output (1650mm)	08	8400 Lumens
	12	12200 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent

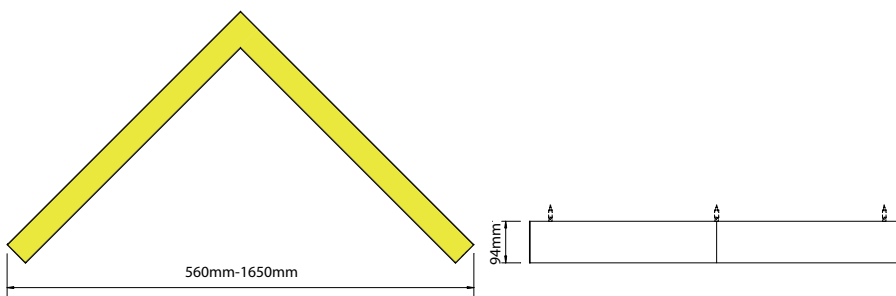

Ambient operating temperature 25°C