



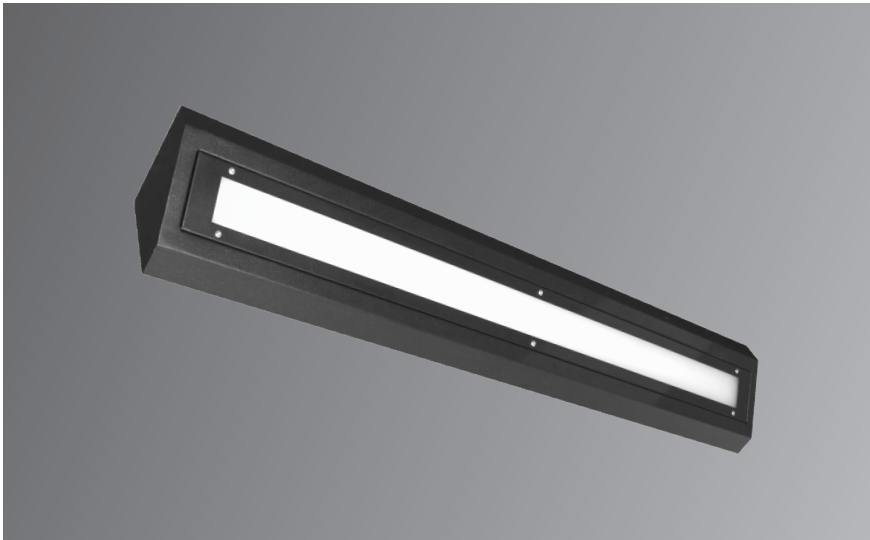


CORNICE

Corner Mounted

MANUFACTURING IN THE
UNITED KINGDOM 

- A robust corner mounted fitting for industrial applications
- Body constructed from powder coated steel
- Flat non corner mount version available
- High transmission clear or opal diffusers
- Tridonic or Philips LED modules and drivers
- Available with tamper proof screws
- Various powder coated finishes
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- IP65 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

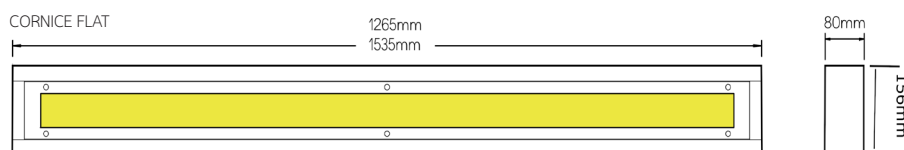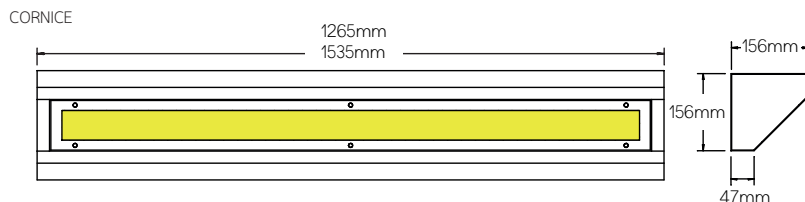

Ambient operating temperature 25°C

PRODUCT CODE		
Product	COR	Cornice (corner)
	CORF	Cornice (flat)
Body Size	13	Length (1265mm)
	15	Length (1535mm)
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (13)	04	4200 Lumens
	06	6200 Lumens
	07	6900 Lumens
	08	8100 Lumens
Output (15)	06	6300 Lumens
	08	8200 Lumens
	09	9400 Lumens
	10	10200 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
	5	5000 Kelvin
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	CL	Clear
Body Colour	W	White
	B	Black
	S	Silver