




DCR RANGE

Bulkheads

MANUFACTURING IN THE
UNITED KINGDOM 

- Body and bezel constructed from Die-Cast aluminium
- TPa rated high transmission opal polycarbonate diffuser
- Tridonic LED modules and drivers
- Wall or ceiling mountable
- Various powder coated finishes
- Available with tamper proof screws
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IP65 rated
- IK10 rated
- 5 year warranty on LED system

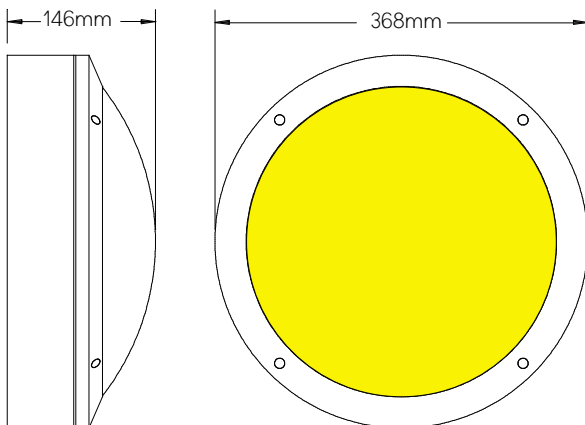

PRODUCT CODE		
Product	DCR	DCR Bulkhead
Body Style	OF	Open Face
	HH	Half Hood
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output	01	1300 Lumens
	02	2200 Lumens
	03	3100 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No Sensor
	MW	Microwave Sensor
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Body Colour	B	Black
	S	Silver
	O	Other/Specified

Ambient operating temperature 25°C