





DURA

Food Grade Moisture Resistant

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission clear or opal panel
- Rear access as standard for ease of maintenance, suitable for walk on ceilings
- Front access version available
- Tridonic or Philips LED modules and drivers
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Bespoke sizes and outputs made to order
- IP65 from below the ceiling
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

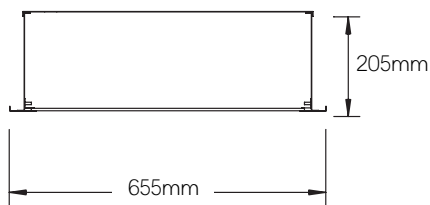

PRODUCT CODE		
Product	CNP	Dura
Access	R	Rear Access
	F	Front Access
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output	12	12500 Lumens
	14	13900 Lumens
	16	16300 Lumens
	18	18700 Lumens
	21	21000 Lumens
	24	24400 Lumens
	28	28100 Lumens
	30	29800 Lumens
	33	33200 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
	5	5000 Kelvin
Sensor	-	No Sensor
	PM	PIR Mid (up to 12m)
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	EX	High Output 3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	CL	Clear
Body Colour	W	White
	B	Black

Ambient operating temperature 25°C