

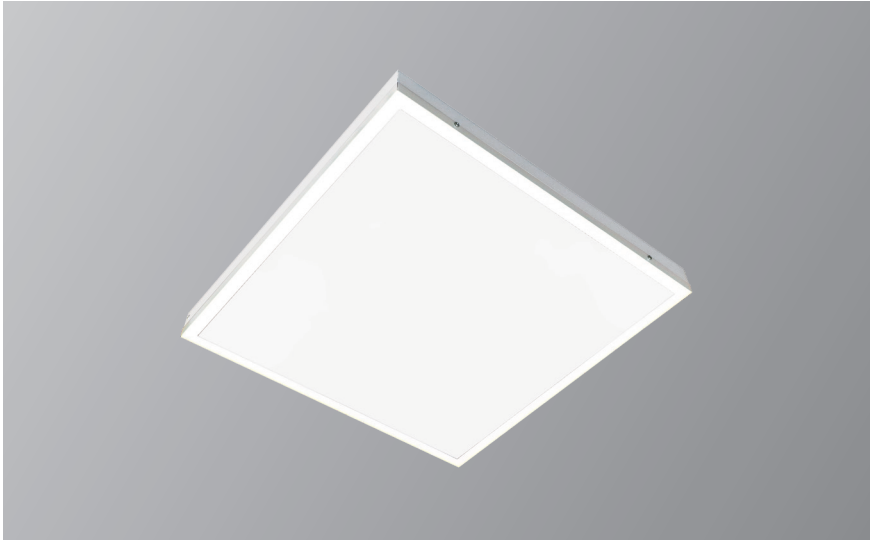


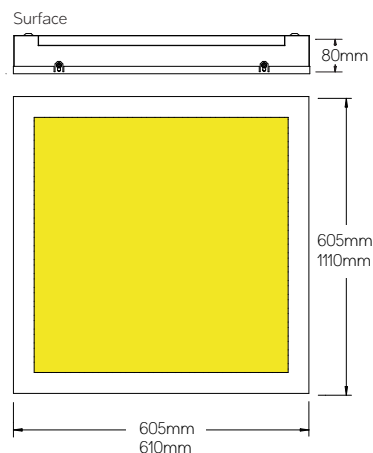

ENDOR Recessed & Surface

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Recessed version suitable for 15mm & 25mm T ceiling types
- Suspended version available
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Bespoke sizes and outputs made to order
- Various powder coated finishes
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IP20 rated
- 5 year warranty on LED system

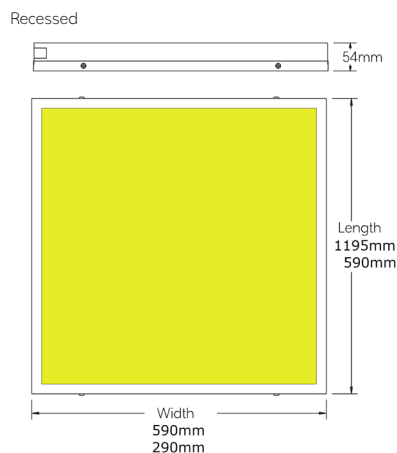

PRODUCT CODE		
Product	END	Endor
Mounting	RC	Recessed
	SF	Surface
Body Size (RC)	66	590mm X 590mm
	123	1195mm X 290mm
	126	1195mm X 590mm
Body Size (SF)	66	605mm X 605mm
	126	1110mm X 610mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (66)	04	4100 Lumens
	05	5000 Lumens
	06	6100 Lumens
	07	7200 Lumens
Output (123)	04	4100 Lumens
	05	5000 Lumens
	06	6100 Lumens
	07	7200 Lumens
Output (126)	08	8300 Lumens
	10	10000 Lumens
	12	12200 Lumens
	14	14400 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
	5	5000 Kelvin
Sensor	-	No Sensor
	MS	Mini Sensor
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified

Ambient operating temperature 25°C