


ENDOR ECO

Recessed & Surface

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from painted aluminium
- High transmission microprism diffuser to aid in achieving UGR<19
- Tridonic LED modules and drivers
- Designed to suit 15mm & 25mm T-bar ceilings
- Surface mounting kit available
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IK02 rated
- IP20 rated
- 5 year warranty on LED system

PRODUCT CODE		
Product	ENDEC	Endor Eco
Mounting	RC	Recessed
	SF	Surface mount kit
Body Size	66	595mm X 595mm
	123	1195mm X 295mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	T	Touch Dimming Driver
Output (66)	02	2300 Lumens
	03	3200 Lumens
	04	3900 Lumens
Output (123)	02	2300 Lumens
	03	3200 Lumens
	04	3900 Lumens
Colour Temperature	30	3000 Kelvin
	40	4000 Kelvin
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	MP	Microprism
	MPTPA	TPA Microprism
Body Colour	W	White

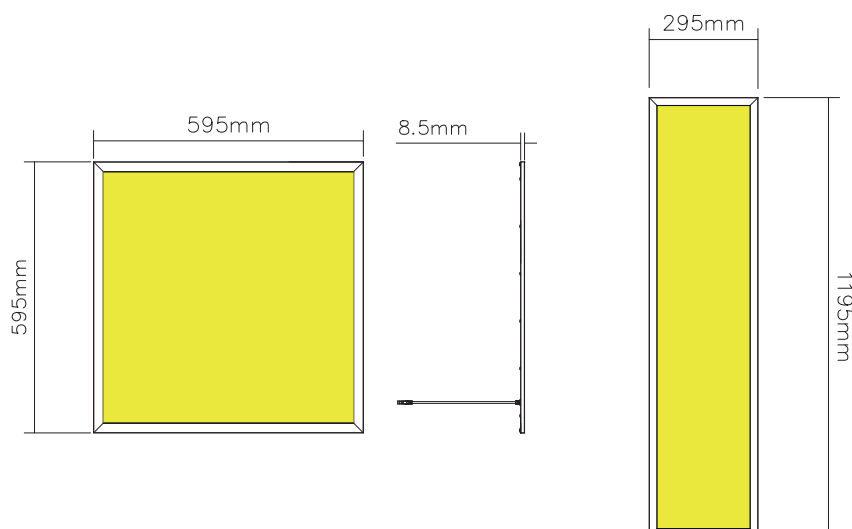

Ambient operating temperature 25°C - Do not cover back of fitting