




## GRAVITY Recessed Downlight

MANUFACTURING IN THE  
UNITED KINGDOM 

- Die cast aluminium bezel
- Passive aluminium heatsink
- Tridonic LED modules and drivers
- Interchangeable accessories
- IP65 bezel available
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Wireless option available
- 5 year warranty on LED system

### PRODUCT CODE

|                    |         |                              |
|--------------------|---------|------------------------------|
| Product            | GR      | Gravity Downlight            |
| Driver             | S       | Standard Driver              |
|                    | D       | Dali Driver                  |
|                    | W       | Wireless Dim                 |
|                    | T       | Touch Dimming Driver         |
| Output             | 10      | 1000 Lumens                  |
|                    | 20      | 1800 Lumens                  |
|                    | 30      | 2800 Lumens                  |
| Colour Temperature | 30      | 3000 Kelvin                  |
|                    | 40      | 4000 Kelvin                  |
| Beam Angle         | 40      | 40° Specular Reflector       |
|                    | 50      | 50° Faced Reflector          |
|                    | 60      | 60° Satin Reflector          |
| Emergency          | -       | No Emergency                 |
|                    | EL      | 3 Hour Emergency             |
|                    | ST      | Self-Test 3 Hour Emergency   |
|                    | ED      | DALI EM Pro 3 Hour Emergency |
| Bezel Colour       | W       | White                        |
|                    | B       | Black                        |
|                    | S       | Silver                       |
| Accessories        | -       | No Accessories               |
|                    | CG      | Clear Glass                  |
|                    | EG      | Etched Glass                 |
|                    | CG/IP65 | IP65 Clear Glass             |
|                    | CP/IP65 | IP65 Clear Polycarbonate     |
|                    | OP/IP65 | IP65 Opal Polycarbonate      |

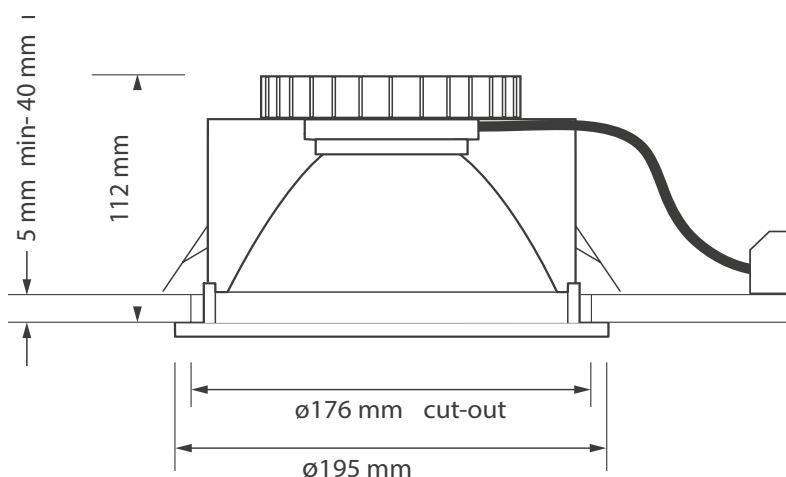

Ambient operating temperature 25°C