




JUNO Obround Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Steel single piece housing (meaning no on-site assembly)
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Bespoke outputs made to order
- Downlight only
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coating finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

PRODUCT CODE		
Product	JUN	Juno Pendant
Body Size	06	600mm x 1500mm
	09	900mm x 1900mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (600mm)	T	Touch Dimming Driver
	12	12000 Lumens
Output (900mm)	18	18000 Lumens
	16	16000 Lumens
Colour Temperature	24	24000 Lumens
	3	3000 Kelvin
CRI	4	4000 Kelvin
	S	80
Emergency Lithium LiFePO4	N	90
	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
Body Colour	ED	DALI EM Pro 3 Hour Emergency
	W	White
	B	Black
	S	Silver
Cable Colour	G	Gold
	O	Other/Specified
	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent

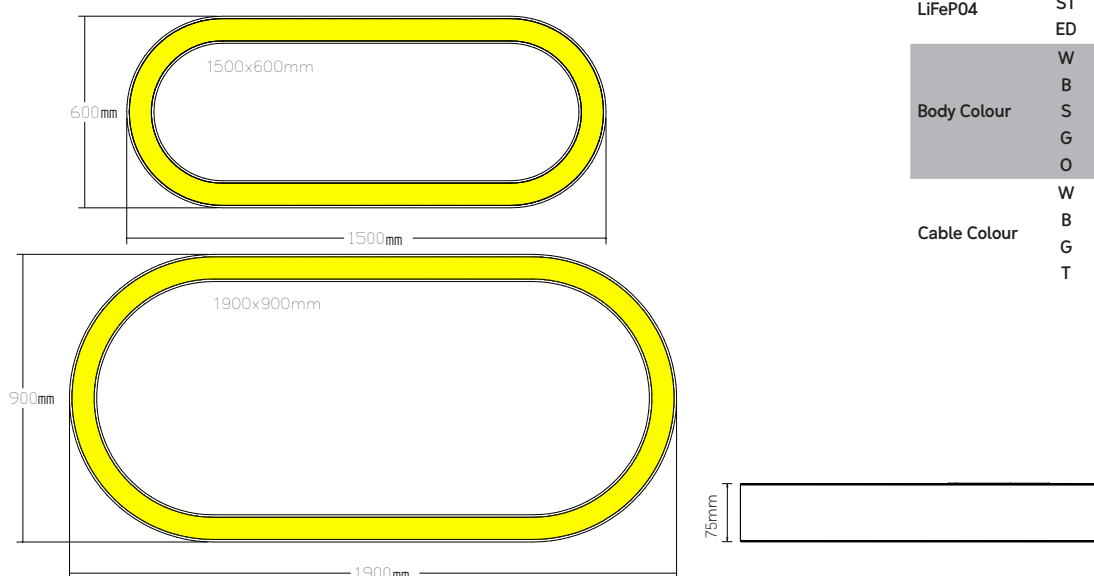

Ambient operating temperature 25°C