


KESSE

Surface Linear

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission opal diffuser for general illumination
- High racking (narrow beam) or open areas (medium beam) lenses available
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and driver
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Bespoke lengths or continuous run available on request
- Various powder coated finishes
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IP20 rated
- 5 year warranty on LED system

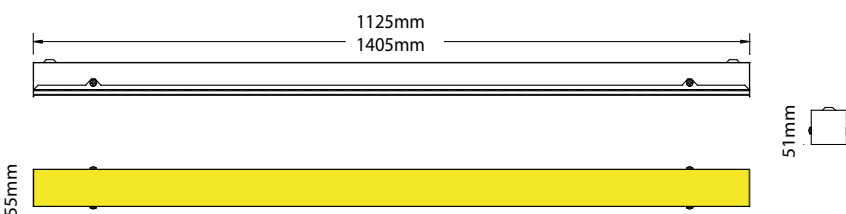

PRODUCT CODE		
Product	KES	Kesse
Body Size	11	Length (1125mm)
	14	Length (1405mm)
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (1125mm)	T	Touch Dimming Driver
	04	4200 Lumens
	05	5000 Lumens
	06	6200 Lumens
	07	6900 Lumens
Output (1405mm)	08	8100 Lumens
	05	5200 Lumens
	06	6300 Lumens
	07	7300 Lumens
	08	8200 Lumens
Colour Temperature	09	9400 Lumens
	10	10200 Lumens
	3	3000 Kelvin
Sensor	4	4000 Kelvin
	5	5000 Kelvin
Emergency Lithium LiFePO4	-	No Sensor
	TS	Thumb Sensor
	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
Diffuser	ED	DALI EM Pro 3 Hour Emergency
	OP	Opal
	CL	Clear
Body Colour	MP	Microprism
	NB	60° (narrow beam)
	MB	90° (medium beam)
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified

Ambient operating temperature 25°C