


MERIDIAN TRACK

Track Mounted Linear

MANUFACTURING IN THE
UNITED KINGDOM 

- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only
- Multiple coloured diffuser inserts available
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

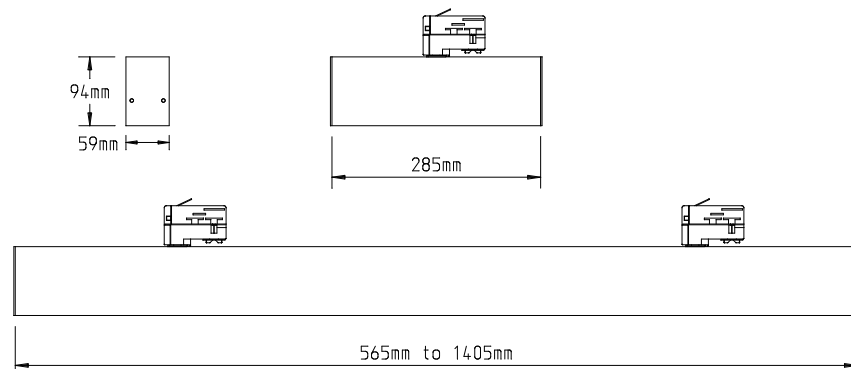

PRODUCT CODE		
Product	MT	Meridian Track
Body Size	03	Length 285mm
	06	Length (565mm)
	08	Length (845mm)
	11	Length (1125mm)
	14	Length (1405mm)
Configuration	-	Track Mounted
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output	01	1000 Lumens (300mm)
	02	2100 Lumens (565mm)
	03	3100 Lumens (845mm)
	04	4200 Lumens (1125mm)
	05	5200 Lumens (1405mm)
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Sensor *	-	No Sensor
	PR	PIR Sensor
Emergency *	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver

* Not available in all body sizes.

Ambient operating temperature 25°C



www.contrac-lighting.co.uk | 01405 766550 | sales@contrac-lighting.co.uk

Please be aware that our policy is one of constant development and improvement. Whilst every effort is made for all details to be correct, specification and or appearance may change without prior notice.