


NEPTUNE

Non-Corrosive

MANUFACTURING IN THE
UNITED KINGDOM 

- Body & diffuser constructed from polycarbonate
- Tridonic or Philips LED modules and drivers
- Stainless steel clips as standard
- Chill version for chiller / cold store environments where protection from temperatures down to -20°C is required
- Wireless option available
- IK07 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IP65 rated
- 5 year warranty on LED system

PRODUCT CODE		
Product	CR	Neptune
	CRX	Neptune Chill
Body Size	12	Length 1262mm
	15	Length 1562mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (4ft)	04	4200 Lumens
	05	5000 Lumens
	06	6200 Lumens
	07	6900 Lumens
	08	8100 Lumens
Output (5ft)	06	6300 Lumens
	07	7300 Lumens
	08	8200 Lumens
	09	9400 Lumens
	10	10200 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
	5	5000 Kelvin
Sensor	-	No Sensor
	MW	Microwave Sensor
	TS	Thumb Sensor
	TSHC	Thumb Sensor -30° (up to 15m)*
Emergency Lithium LiFePO4** +5 °C Min Temp	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency

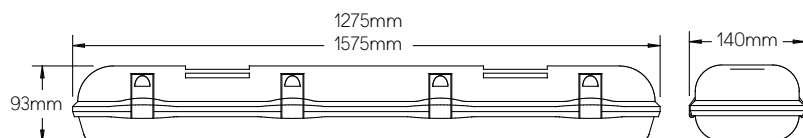

CRX CHILL (NOT AVAILABLE WITH ALL OPTIONS)

- * Thumb Sensor -30 °C (up to 15m) option only TSHC
- ** Emergency option +5 °C minimum temperature

Ambient operating temperature 25°C



www.contrac-lighting.co.uk | 01405 766550 | sales@contrac-lighting.co.uk

Please be aware that our policy is one of constant development and improvement. Whilst every effort is made for all details to be correct, specification and or appearance may change without prior notice.