





ORGANA High Output Linear

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High racking (narrow beam) or open areas (medium beam) lenses
- Optional high transmission opal diffuser for lower mounting heights
- Tridonic or Philips LED modules and drivers
- Efficacies of over 166 luminaire lumens per watt
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Suitable for suspension, trunking or surface mount
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

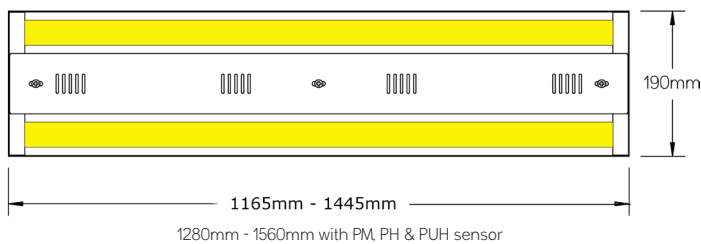

Ambient operating temperature 25°C

PRODUCT CODE		
Product	ORG	Organa
Body Size	-	1165mm
	XL	1445mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (1165mm)	08	8400 Lumens
	10	10000 Lumens
	12	12500 Lumens
	14	13900 Lumens
	16	16300 Lumens
	18	18700 Lumens
	21	21000 Lumens
	24	24400 Lumens
Output (1445mm)	11	10500 Lumens
	13	12600 Lumens
	16	15600 Lumens
	17	17300 Lumens
	20	20400 Lumens
	23	23400 Lumens
	26	26200 Lumens*
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
	5	5000 Kelvin
Sensor*	-	No Sensor
	TS	Thumb Sensor (up to 7m)
	PM	PIR Mid (up to 12m)
	PH	PIR High (up to 16m)
	PUH	PIR Ultra High (up to 20m)
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	EX	High Output 3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	NB	60° (narrow beam)
	MB	90° (medium beam)
	OP	Opal
	CL	Clear
Body Colour	W	White
	B	Black

* EX Emergency option not available