
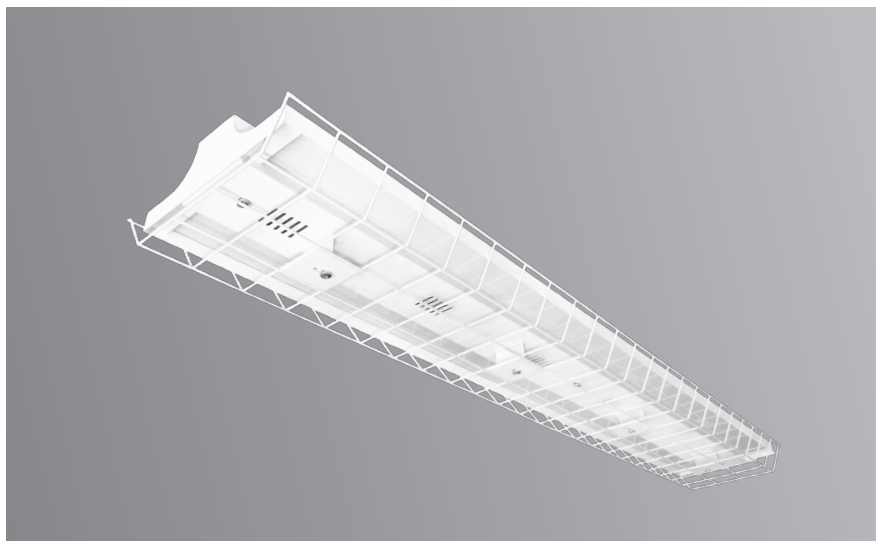



## ORGANA SPORT

### High Output Wire Guarded Linear

MANUFACTURING IN THE  
UNITED KINGDOM 

- A robust luminaire built to withstand the rigours of sports hall activities
- Body constructed from powder coated steel with a protective wire ball guard
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Efficacies of over 120 luminaire lumens per watt
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Suitable for suspension, trunking or surface mount
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

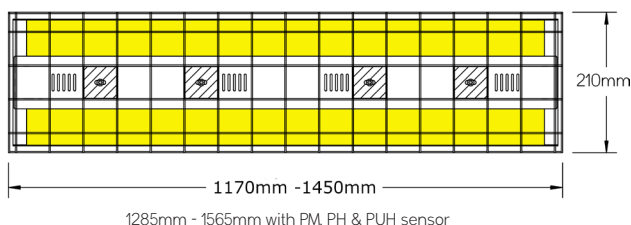

Ambient operating temperature 25°C

| PRODUCT CODE              |     |                              |
|---------------------------|-----|------------------------------|
| Product                   | OSP | Organa Sport                 |
| Body Size                 | -   | 1165mm                       |
|                           | XL  | 1445mm                       |
| Driver                    | S   | Standard Driver              |
|                           | D   | Dali Driver                  |
|                           | W   | Wireless Dim                 |
|                           | A   | 1-10V Driver                 |
|                           | T   | Touch Dimming Driver         |
| Output (1165mm)           | 08  | 8400 Lumens                  |
|                           | 10  | 10000 Lumens                 |
|                           | 12  | 12500 Lumens                 |
|                           | 14  | 13900 Lumens                 |
|                           | 16  | 16300 Lumens                 |
|                           | 18  | 18700 Lumens                 |
|                           | 21  | 21000 Lumens                 |
|                           | 24  | 24400 Lumens                 |
| Output (1445mm)           | 11  | 10500 Lumens                 |
|                           | 13  | 12600 Lumens                 |
|                           | 16  | 15600 Lumens                 |
|                           | 17  | 17300 Lumens                 |
|                           | 20  | 20400 Lumens                 |
|                           | 23  | 23400 Lumens                 |
|                           | 26  | 26200 Lumens                 |
|                           | 31  | 30500 Lumens                 |
| Colour Temperature        | 3   | 3000 Kelvin                  |
|                           | 4   | 4000 Kelvin                  |
|                           | 5   | 5000 Kelvin                  |
| Sensor*                   | -   | No Sensor                    |
|                           | PL  | PIR Low (up to 3.5m)         |
|                           | PM  | PIR Mid (up to 12m)          |
|                           | PH  | PIR High (up to 16m)         |
| Emergency Lithium LiFePO4 | -   | No Emergency                 |
|                           | EL  | 3 Hour Emergency             |
|                           | EX  | High Output 3 Hour Emergency |
|                           | ST  | Self-Test 3 Hour Emergency   |
|                           | ED  | DALI EM Pro 3 Hour Emergency |
| Diffuser                  | OP  | Opal                         |
|                           | MP  | Microprism                   |
| Body Colour               | W   | White                        |
|                           | B   | Black                        |

\* EX Emergency option not available