




OTTO Geometrical Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Available in a variety of bespoke geometric shapes and sizes such as pentagon, heptagon, decagon etc
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

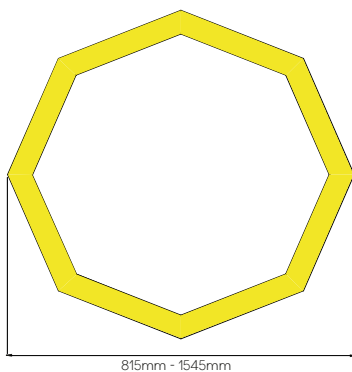

Ambient operating temperature 25°C

PRODUCT CODE

Product	OTT	Otto Pendant
Body Size	08	815mm
	12	1180mm
	15	1545mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (815mm)	08	8400 Lumens
	13	13600 Lumens
Output (1180mm)	13	12600 Lumens
	20	20400 Lumens
Output (1545mm)	17	16900 Lumens
	27	26500 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent