




QUARTET QSL Track Mounted Spotlight

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- Passive cooling aluminium heatsink
- Twist lock metalised polycarbonate reflector
- Interchangeable reflectors
- Tridonic LED modules and drivers
- Surface mount version available for areas without track
- High colour rendering
- 3 step MacAdam CRI 80/90/95
- 2 step MacAdam CRI 97 Art
- Anti-Glare cowl and barn door accessories available
- Wireless option available
- 5 year warranty on LED system

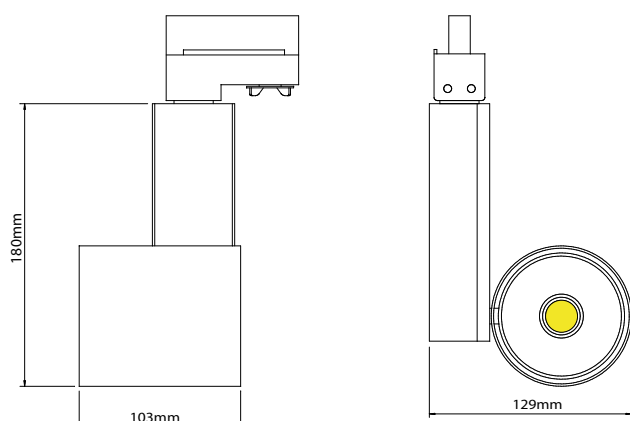

PRODUCT CODE		
Product	QSL	QSL Spotlight
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver C/W Potentiometer*
Output	10	900 Lumens
	15	1500 Lumens
	20	2100 Lumens
	25	2700 Lumens
Colour Temperature	2	2700 Kelvin
	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
	F	95 Fashion**
	A	97 Art***
Beam Angle	S	Spot Twist-lock Reflector
	M	Medium Twist-lock Reflector
	W	Wide Twist-lock Reflector
Mounting	TC	3-Circuit Track Adapter
	SC	Single Circuit Track Adapter
	DT	Dali Track Adapter
	SF	Surface Mounted
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified

* Not available in all outputs
 ** 3250K only
 *** 3000K only

Ambient operating temperature 25°C

