



ROGUE CHILL


Low Temperature High/Low Bay

MANUFACTURING IN THE
UNITED KINGDOM 

- Specifically developed to be used in chiller / cold store environments where protection from temperatures down to -30°C is required
- Body constructed from powder coated steel
- This luminaire utilises a special paint process to ensure ultimate protection
- Clear polycarbonate diffuser
- Narrow or medium beam lenses available
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Efficacies of up to 155 luminaire lumens per watt
- Various additional mounting brackets available
- Wireless option available*
- LiFePO4 Lithium Battery for extended emergency life
- IP65 rated
- 5 year warranty on LED system

PRODUCT CODE

Product	ROGX	Rogue Chill
Body Size	4	535mm (12-24)
	6	535mm (28-36)
	8	655mm (37-48)
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim *- 20°C
	T	Touch Dimming Driver
Output	12	12500 Lumens
	14	13900 Lumens
	16	16300 Lumens
	18	18700 Lumens
	21	21000 Lumens
	24	24400 Lumens
	28	28100 Lumens
	30	29800 Lumens
	33	33200 Lumens
	36	36600 Lumens
	38	37500 Lumens
	40	39700 Lumens
Colour Temperature	42	42000 Lumens
	47	46500 Lumens
	49	48800 Lumens
	3	3000 Kelvin
	4	4000 Kelvin
Sensor	5	5000 Kelvin
	MW	Microwave (up to 12m) non dim
Emergency Lithium LiFePO4	TSH	Thumb Sensor High (up to 15m)
	-	No Emergency
	RE/EL	3 Hour Emergency **
	RE/EX	High Output 3 Hour Emergency **
RE / Remote Emergency	RE/ST	Self-Test 3 Hour Emergency**
	RE/ED	DALI EM Pro 3 Hour Emergency**
Diffuser	CL	Clear
	OP	Opal
	NB	60° (narrow beam)+Clear
	MB	90° (medium beam)+Clear
Body Colour	W	White
	B	Black

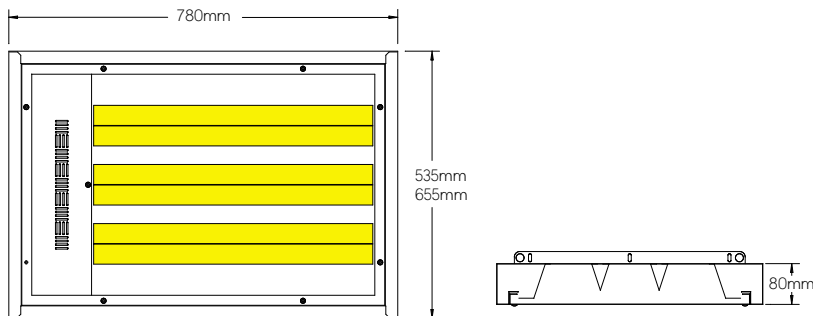

Ambient operating temperature 25°C

* Wireless dim minimum temperature -20°C

**Remote Emergency option only RE