


Rokko Geometrical Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Available in a variety of bespoke geometric shapes and sizes such as pentagon, hexagon, heptagon, decagon etc
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

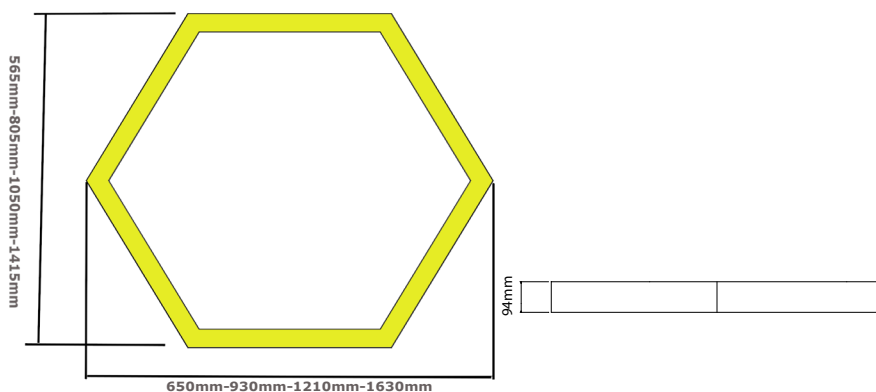

Ambient operating temperature 25°C

PRODUCT CODE		
Product	ROK	Rokko Pendant
Body Size	06	650mm x 565mm
	09	930mm x 805mm
	12	1210mm x 1050mm
	15	1630mm x 1415mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (650mm)	06	6300 Lumens
	10	10000 Lumens
Output (930mm)	10	9500 Lumens
	15	14900 Lumens
Output (1210mm)	13	12600 Lumens
	20	19800 Lumens
Output (1630mm)	18	17500 Lumens
	27	27300 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent