


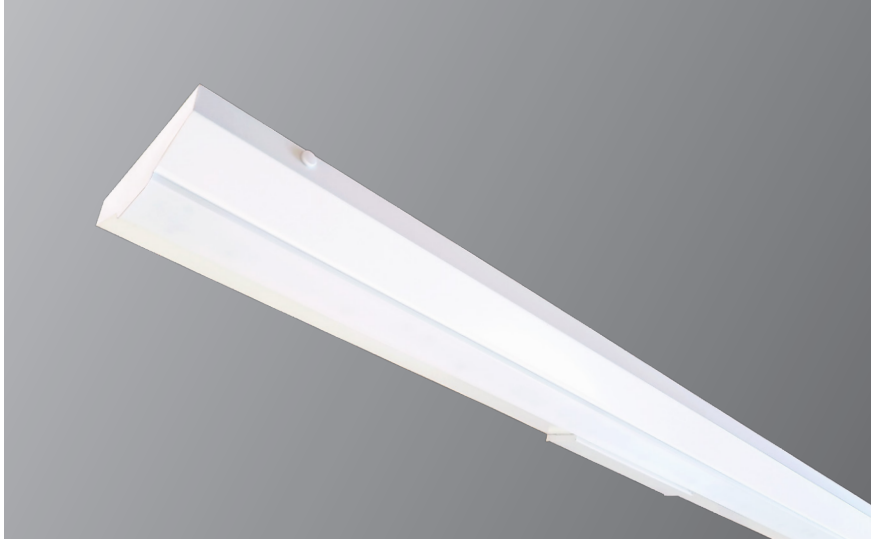


## SCOUT Linear


MANUFACTURING IN THE  
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission opal diffuser for general illumination
- Stand alone or continuous run lighting system
- End caps, joining brackets and optics available to suit all applications
- Tridonic or Philips LED modules and drivers
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Bespoke sizes and outputs made to order
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

Standard Body

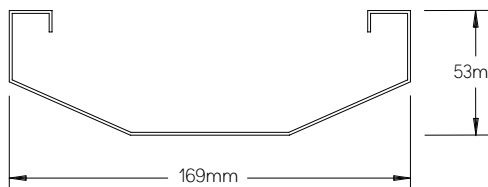

Compact Body

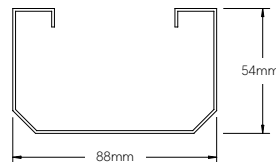

Ambient operating temperature 25°C

| PRODUCT CODE              |     |                              |
|---------------------------|-----|------------------------------|
| Product                   | SC  | Scout                        |
|                           | SCC | Scout Compact                |
| Mounting                  | SP  | Suspended Mount              |
|                           | SF  | Surface Mount                |
| Body Size                 | 11  | Length (1125mm)              |
|                           | 14  | Length (1405mm)              |
|                           | 17  | Length (1685mm)              |
|                           | 23  | Length (2250mm)              |
| Drivers                   | S   | Standard Driver              |
|                           | D   | Dali Driver                  |
|                           | W   | Wireless Dim                 |
|                           | A   | 1-10V Driver                 |
|                           | T   | Touch Dimming Driver         |
| Output                    | 04  | 4200 Lumens (1125mm)         |
|                           | 05  | 5200 Lumens (1405mm)         |
|                           | 06  | 6300 Lumens (1685mm)         |
|                           | 08  | 8400 Lumens (2250mm)         |
| Colour Temperature        | 30  | 3000 Kelvin                  |
|                           | 40  | 4000 Kelvin                  |
| Sensor                    | -   | No Sensor                    |
|                           | MS  | Mini Sensor                  |
|                           | PL  | PIR Low (up to 3.5m)         |
|                           | PM  | PIR Mid (up to 12m)          |
| Emergency Lithium LiFePO4 | -   | No Emergency                 |
|                           | EL  | 3 Hour Emergency             |
|                           | ST  | Self-Test 3 Hour Emergency   |
|                           | ED  | DALI EM Pro 3 Hour Emergency |
| Body Colour               | W   | White                        |
|                           | B   | Black                        |
|                           | S   | Silver                       |
| Diffuser                  | OP  | Opal                         |
|                           | CL  | Clear                        |
|                           | NB  | 60° (Narrow Beam)            |
|                           | MB  | 90° (Medium Beam)            |