
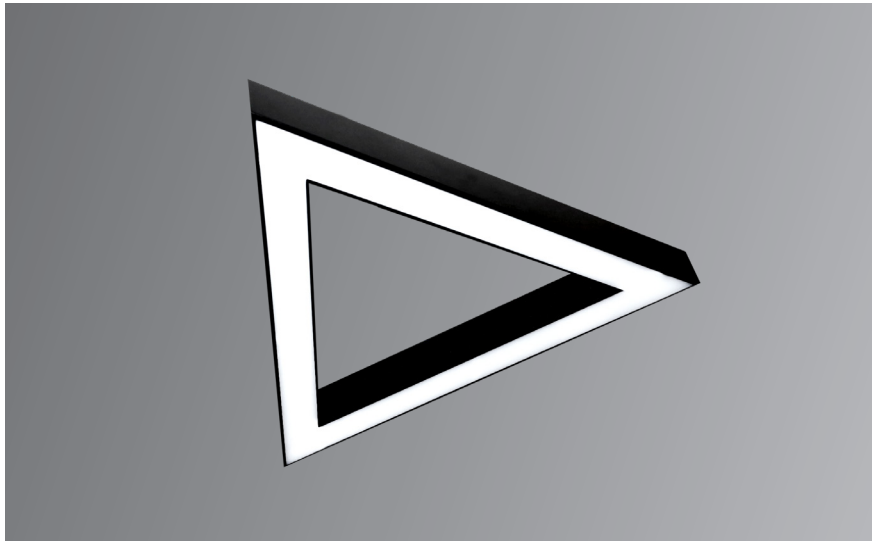


## SHARD Triangular Pendant

MANUFACTURING IN THE  
UNITED KINGDOM 

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

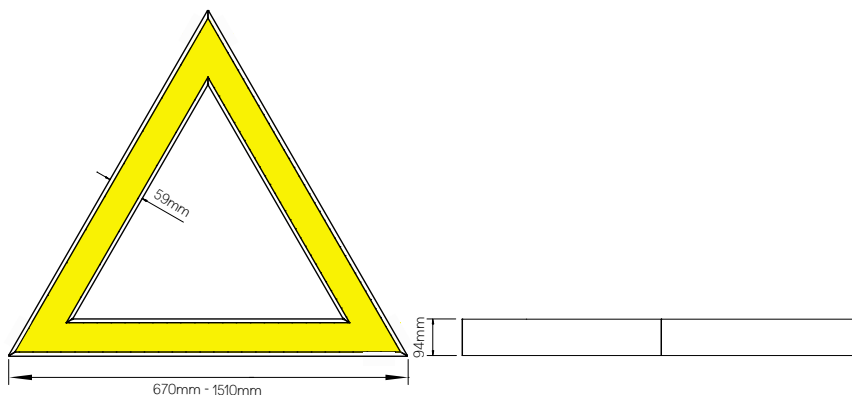

Ambient operating temperature 25°C

| PRODUCT CODE                     |            |                              |
|----------------------------------|------------|------------------------------|
| <b>Product</b>                   | <b>SHA</b> | Shard Pendant                |
| <b>Body Size</b>                 | <b>07</b>  | 670mm                        |
|                                  | <b>08</b>  | 810mm                        |
|                                  | <b>12</b>  | 1230mm                       |
|                                  | <b>15</b>  | 1510mm                       |
| <b>Driver</b>                    | <b>S</b>   | Standard Driver              |
|                                  | <b>D</b>   | Dali Driver                  |
|                                  | <b>W</b>   | Wireless Dim                 |
|                                  | <b>A</b>   | 1-10V Driver                 |
|                                  | <b>T</b>   | Touch Dimming Driver         |
| <b>Output (670mm)</b>            | <b>06</b>  | 6300 Lumens                  |
|                                  | <b>10</b>  | 9900 Lumens                  |
| <b>Output (810mm)</b>            | <b>08</b>  | 7900 Lumens                  |
|                                  | <b>12</b>  | 12400 Lumens                 |
| <b>Output (1230mm)</b>           | <b>13</b>  | 12600 Lumens                 |
|                                  | <b>20</b>  | 19800 Lumens                 |
| <b>Output (1510mm)</b>           | <b>16</b>  | 15800 Lumens                 |
|                                  | <b>25</b>  | 24800 Lumens                 |
| <b>Colour Temperature</b>        | <b>3</b>   | 3000 Kelvin                  |
|                                  | <b>4</b>   | 4000 Kelvin                  |
| <b>CRI</b>                       | <b>S</b>   | 80                           |
|                                  | <b>N</b>   | 90                           |
| <b>Emergency Lithium LiFePO4</b> | <b>-</b>   | No Emergency                 |
|                                  | <b>EL</b>  | 3 Hour Emergency             |
|                                  | <b>ST</b>  | Self-Test 3 Hour Emergency   |
|                                  | <b>ED</b>  | DALI EM Pro 3 Hour Emergency |
| <b>Diffuser</b>                  | <b>OP</b>  | Opal                         |
|                                  | <b>MP</b>  | Microprism                   |
| <b>Body Colour</b>               | <b>W</b>   | White                        |
|                                  | <b>B</b>   | Black                        |
|                                  | <b>S</b>   | Silver                       |
|                                  | <b>G</b>   | Gold                         |
|                                  | <b>O</b>   | Other/Specified              |
| <b>Cable Colour</b>              | <b>W</b>   | White PVC                    |
|                                  | <b>B</b>   | Black PVC                    |
|                                  | <b>G</b>   | Grey PVC                     |
|                                  | <b>T</b>   | Transparent                  |