


SHUTTLE 150

Tubular Suspended Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- Passive cooling aluminium heat sink
- Tridonic LED modules and drivers
- Supplied with adjustable 3m drop wire suspension kit
- Downlight only
- Surface mounting option available
- Track mounting option available
- Small colour tolerance
- 3 step MacAdam CRI 80/90/95
- 2 step MacAdam CRI97
- Various powder coating finishes
- Xicato LED available
- IP20 rated
- Wireless option available
- 5 year warranty on LED system

PRODUCT CODE		
Product	ST15	Shuttle Pendant
Mounting	SP	Wire suspended
	SF	Surface
Body Size	2	260mm
	4	450mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver*
	T	Touch Dimming Driver
Output (260mm)	10	900 Lumens
	20	2100 Lumens
Output (450mm)	01	900 Lumens
	02	2100 Lumens
	03	3300 Lumens
	04	4400 Lumens
	05	5500 Lumens
Colour Temperature	2	2700 Kelvin
	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
	F	95 Fashion**
	A	97 Art***
Beam Angle	10	10° Twist-lock Reflector
	30	30° Twist-lock Reflector
	45	45° Twist-lock Reflector
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent
Ceiling Mounting Plate	CMP	Ceiling mounting plate with terminal and 1 wire adjustable suspension kit

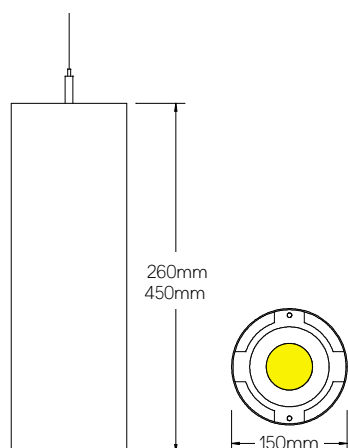

Ambient operating temperature 25°C

* Not available in all outputs
** 3250K only
*** 3000K only

