


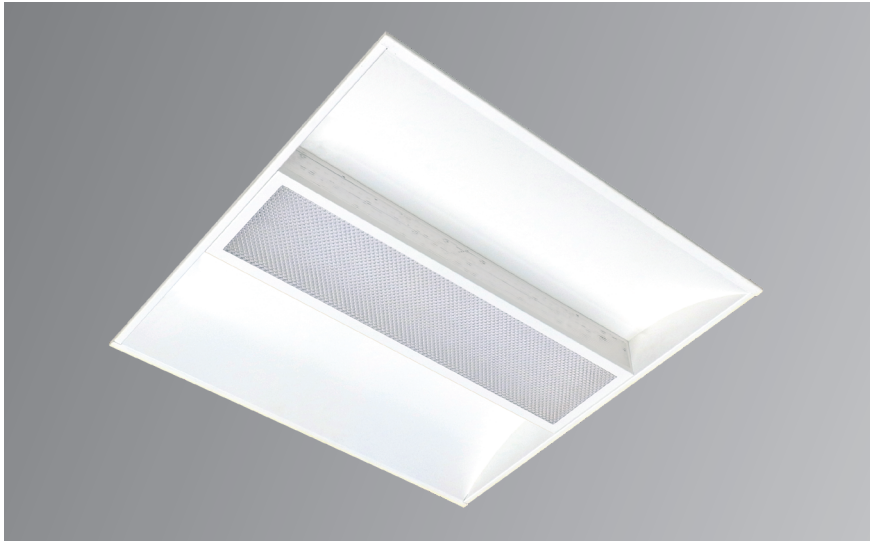


SOFTLUX 8

Direct/Indirect Recessed

MANUFACTURING IN THE
UNITED KINGDOM 

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Suitable for 15mm/25mm T ceiling types
- Pull-up and Concealed T ceiling versions available
- Bespoke sizes and outputs made to order
- Various powder coated finishes
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IP20 rated
- 5 year warranty on LED system

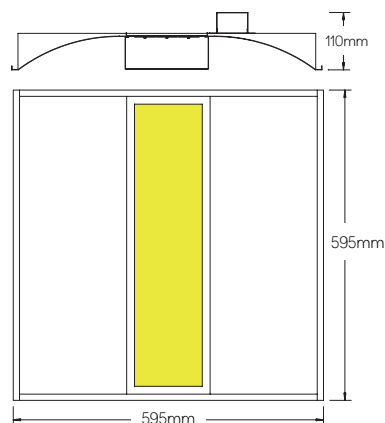

Ambient operating temperature 25°C - Do not cover back of fitting

PRODUCT CODE

Product	S8I	Softlux 8
Mounting	RC	Recessed Lift & Tilt
	UM	Recessed Pull Up
Body Size	66	595mm X 595mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless
	A	1-10V Driver
	T	Touch Dimming Driver
Output	04	4200 Lumens
	05	5000 Lumens
	06	6200 Lumens
	07	6900 Lumens
Colour Temperature	08	8100 Lumens
	30	3000 Kelvin
Sensor	40	4000 Kelvin
	-	No Sensor
Emergency Lithium LiFePO4	MS	Mini Sensor
	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified