


SOLAR Circular Pendant

MANUFACTURING IN THE
UNITED KINGDOM 

- Steel single piece housing (meaning no on-site assembly)
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Bespoke outputs made to order
- Supplied with adjustable 3m drop 3 wire suspension kit and pre-wired with 3m flex
- Optional ceiling mounting point
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coating finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

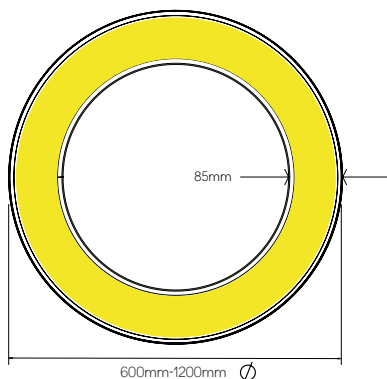

PRODUCT CODE		
Product	SOL	Solar Pendant
Body Size	06	600mm
	09	900mm
	12	1200mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (600mm)	04	3500 Lumens
	06	6300 Lumens
	10	10100 Lumens
Output (900mm)	06	5500 Lumens
	10	9800 Lumens
	16	15700 Lumens
Output (1200mm)	07	7700 Lumens
	12	13900 Lumens
	20	22100 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
CRI	S	80
	N	90
Emergency Lithium LiFePO4	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent

Optional Single Point Ceiling Mounting Kit

Product	SK010	Ceiling mounting rose with terminal and 3 wire adjustable suspension kit
---------	-------	--

Ambient operating temperature 25°C

