
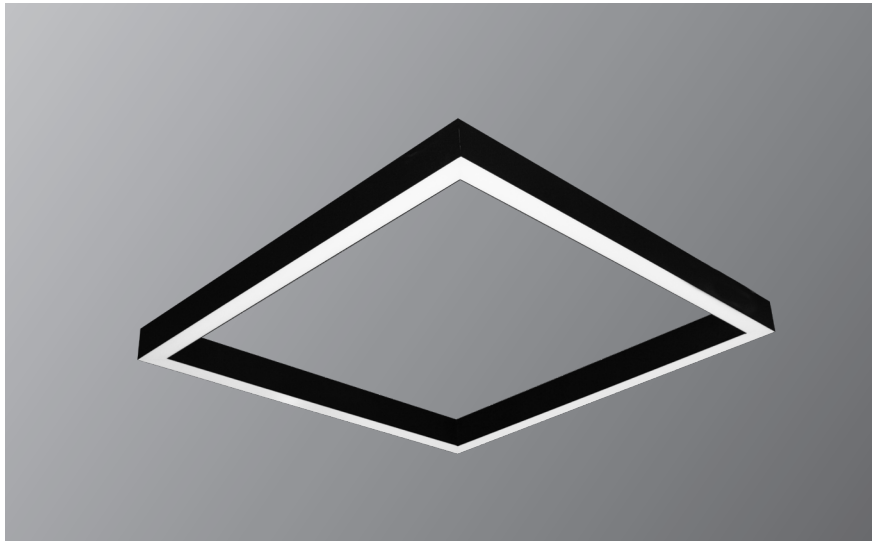


## SPACE Square or Rectangular Pendant

MANUFACTURING IN THE  
UNITED KINGDOM 

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

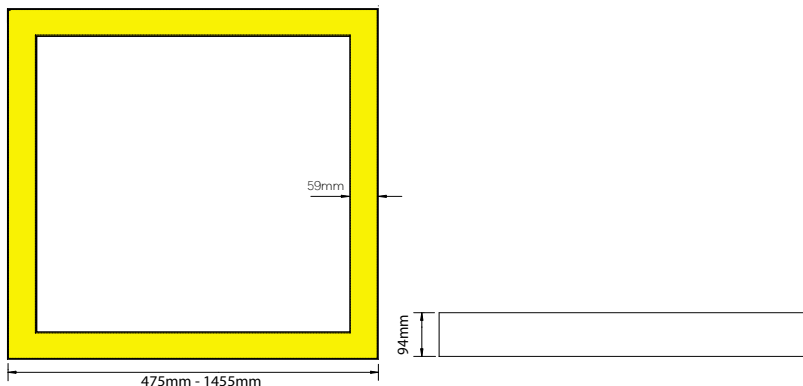

Ambient operating temperature 25°C

| PRODUCT CODE              |     |                              |
|---------------------------|-----|------------------------------|
| Product                   | SPA | Space Pendant                |
| Body Size                 | 05  | 475mm**                      |
|                           | 08  | 755mm                        |
|                           | 12  | 1175mm                       |
|                           | 13  | 1315mm                       |
|                           | 15  | 1455mm                       |
| Driver                    | S   | Standard Driver              |
|                           | D   | Dali Driver                  |
|                           | W   | Wireless Dim                 |
|                           | A   | 1-10V Driver                 |
|                           | T   | Touch Dimming Driver         |
| Output (475mm)            | 03  | 2500 Lumens**                |
|                           | 05  | 5100 Lumens**                |
|                           | 08  | 7500 Lumens**                |
| Output (755mm)            | 04  | 4200 Lumens                  |
|                           | 09  | 8600 Lumens                  |
|                           | 13  | 12600 Lumens                 |
| Output (1175mm)           | 07  | 6800 Lumens                  |
|                           | 14  | 13700 Lumens                 |
|                           | 20  | 20100 Lumens                 |
| Output (1315mm)           | 08  | 7700 Lumens                  |
|                           | 16  | 15400 Lumens                 |
|                           | 23  | 22700 Lumens                 |
| Output (1455mm)           | 09  | 8500 Lumens                  |
|                           | 17  | 17200 Lumens                 |
|                           | 25  | 25200 Lumens                 |
| Colour Temperature        | 3   | 3000 Kelvin                  |
|                           | 4   | 4000 Kelvin                  |
| CRI                       | S   | 80                           |
|                           | N   | 90                           |
| Emergency Lithium LiFePO4 | -   | No Emergency                 |
|                           | EL  | 3 Hour Emergency             |
|                           | ST  | Self-Test 3 Hour Emergency   |
|                           | ED  | DALI EM Pro 3 Hour Emergency |
| Diffuser                  | OP  | Opal                         |
|                           | MP  | Microprism                   |
| Body Colour               | W   | White                        |
|                           | B   | Black                        |
|                           | S   | Silver                       |
|                           | G   | Gold                         |
|                           | O   | Other/Specified              |
| Cable Colour              | W   | White PVC                    |
|                           | B   | Black PVC                    |
|                           | G   | Grey PVC                     |
|                           | T   | Transparent                  |

\*\*Emergency option not available

