



SOLAR Circular Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Steel single piece housing (meaning no on-site assembly)
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Bespoke outputs made to order
- Supplied with adjustable 3m drop 3 wire suspension kit and pre-wired with 3m flex
- Optional ceiling mounting point
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coating finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

PRODUCT CODE	
Product	SOL Solar Pendant
Body Size	06 600mm
	09 900mm
	12 1200mm
Driver	S Standard Driver
	D Dali Driver
	W Wireless Dim
	A 1-10V Driver
Output (600mm)	T Touch Dimming Driver
	04 3600 Lumens
	06 6500 Lumens
Output (900mm)	10 10400 Lumens
	06 5600 Lumens
	10 10100 Lumens
Output (1200mm)	16 16100 Lumens
	07 7900 Lumens
	12 14300 Lumens
Colour Temperature	20 22700 Lumens
	3 3000 Kelvin
RA (Colour Rendering)	4 4000 Kelvin
	S Ra80
Emergency	N Ra90
	- No Emergency
	EL 3 Hour Emergency
	ST Self-Test 3 Hour Emergency
Body Colour	ED 3 Hour Emergency DALI EM Pro
	W White
	B Black
Cable Colour	S Silver
	G Gold
	O Other/Specified
	LM Lithium Emergency
Cable Colour	W White PVC
	B Black PVC
	G Grey PVC
	T Transparent

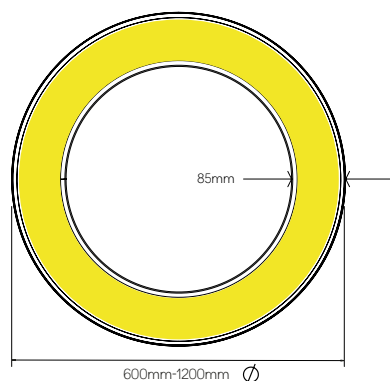

Ambient operating temperature 25°C

Single Point Ceiling Mounting Kit

Product	SK010	Ceiling mounting rose with terminal and 3 wire adjustable suspension kit
----------------	--------------	--

