
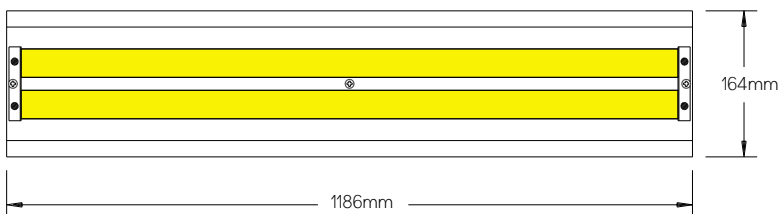


BESPIN

Efficient Rack Lighting

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated zintec steel
- Medium and narrow beam lens
- Tridonic or Philips LED modules and drivers
- First branded LED components make this luminaire much more efficient than most far east alternatives
- Suitable for suspension, surface or trunking mount
- Delivers exceptional uniformity at mounting heights up to 20 metres
- IP20 rated
- Optional high transmission opal diffuser ideal for lower mounting heights
- 5 year warranty on LED system



Ambient operating temperature 25°C

PRODUCT CODE	
Product	BES Bespin LED Rack
Driver	- Standard Driver D Dali Driver B DSI Driver A 1-10V Driver T Touch Dimming Driver
Output <small>(delivered output based on narrow beam lens)</small>	08 8000lm (delivered 7370 - 49W) 10 10000lm (delivered 9929 - 65W) 12 12000lm (delivered 11123 - 71W) 14 14000lm (delivered 12960 - 85W) 16 16000lm (delivered 14767 - 99W) 18 18000lm (delivered 16544 - 114W) 21 21000lm (delivered 19620 - 129W) 23 23000lm (delivered 21390 - 145W)
Colour Temperature	30 3000 Kelvin - 4000 Kelvin
Sensor	- No Sensor TS Thumb Sensor (up to 7m) PL PIR Low (up to 3.5m) PM PIR Mid (up to 12m) PH PIR High (up to 16m)
Emergency	- No Emergency EL 3 Hour Emergency EX 3 Hour Emergency High Output ST Self-Test 3 Hour Emergency ED 3 Hour Emergency DALI EM Pro
Diffuser	NB 60° (narrow) MB 90° (medium) OP Opal