


CASCADE  
 Square Pendant

MANUFACTURING IN THE  
 UNITED KINGDOM

- Steel single piece housing (meaning no on-site assembly)
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Bespoke outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coating finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

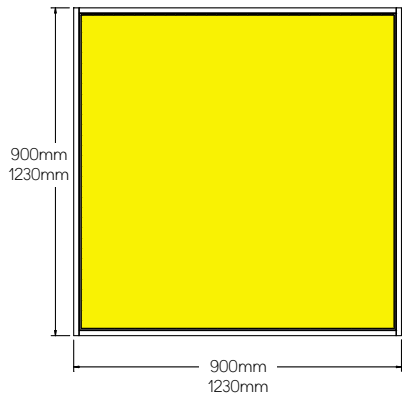

Ambient operating temperature 25°C



PRODUCT CODE		
Product	CAS	Cascade Pendant
Body Size	09	900x900mm
	12	1230x1230mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (900x900)	T	Touch Dimming Driver
	10	9900 Lumens
	12	12500 Lumens
	15	15000 Lumens
Output (1230x1230)	13	13200 Lumens
	17	17700 Lumens
	22	22200 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
RA (Colour Rendering)	S	Ra80
	N	Ra90
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self Test 3 Hour Emergency
	ED	3 Hour Emergency Dali EM Pro
	LM	Lithium Emergency
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Cable Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent