




EMBULK Emergency Bulkhead

- Neat and compact polycarbonate base and lens
- Lumen output 135lm maximum without sign legend
- Sign viewing distance 30m
- Maintained power supply 5W
- Colour temperature 4200K
- IP65 rated
- Emergency duration in maintained operation 3 hours
- Designed to comply with BS EN 60598-2-22 standards
- Optional Dali / Self-test emergency operation
- Self-test in accordance with BSEN62034
- Available with self-adhesive legend kits. ISO and EC safety pictogram legends

PRODUCT CODE		
Product	EMBULK	Emergency Bulkhead LED
Operation	-	Standard 3 Hour
	D	Self-Test / Dali Controlled

Exit Legends (optional)

Blade Exit Legends	ECAR	EC Format - Arrow Right/Left
	ECAD	EC Format - Arrow Down
	ISOAR	ISO Format - Arrow Right
	ISOAU	ISO Format - Arrow Up

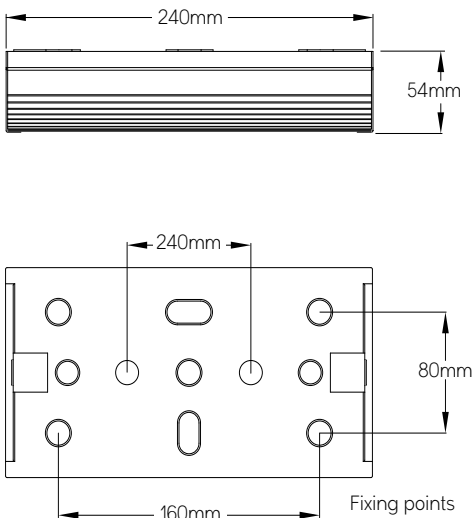

Ambient operating temperature 25°C

