
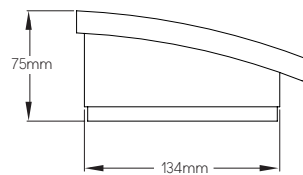


EMCURVE

Curved Emergency Exit Sign

- Polycarbonate enclosure with attractive sloping front opal panel
- Screen printed safety sign legends
- ISO and EC safety pictogram legends
- Lumen output 120lm max without sign legend
- Sign viewing distance 30m
- IP42 rated
- Emergency duration in maintained operation 3 hours
- Designed to comply with BS EN 60598-2-22 standards
- Optional Dali / Self-test emergency operation
- Self-test in accordance with BSEN62034

PRODUCT CODE		
Product	EMCURVE	Emergency Curve LED
Operation	-	Standard 3 Hour
	D	Self-Test / Dali Controlled
Legends	ECAR	EC Format Arrow Right
	ECAL	EC Format Arrow Left
	ECAD	EC Format Arrow Down
	ISOAR	ISO Format Arrow Right
	ISOAL	ISO Format Arrow Left
	ISOAU	ISO Format Arrow Down

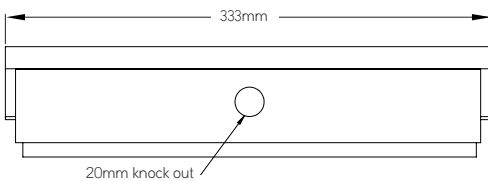

Ambient operating temperature 25°C