




EMSUSP Emergency Signage

- Polycarbonate housing with a translucent suspended legend plate
- Surface suspended
- Suspends from 15mm - 1 metre
- First fix plate for ease of installation
- Screen printed directional pictogram legends
- Option of ISO or EC signage
- 25m viewing distance
- Colour temperature 4500K
- 3 Hours maintained or non-maintained emergency operation
- LiFePO4 Lithium Battery for extended life
- Designed to fully comply with the relevant parts of EN60598.2.22
- IP20 rated

PRODUCT CODE		
Product	EMSUSP	Suspended Emergency
Operation	EL ED	Standard Standalone Self-Test / Dali Emergency
Legend	UNI	Full Universal Legend Kit
Body Colour	W	White

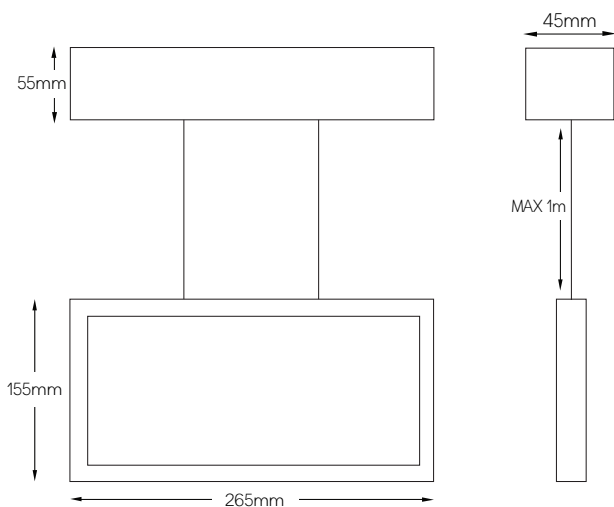

Ambient operating temperature 25°C

