




KESLE
 Surface Linear

MANUFACTURING IN THE
 UNITED KINGDOM

- Slim discreet linear luminaire
- Body constructed from powder coated steel
- Opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Bespoke lengths or continuous runs available on request
- Various powder coated finishes
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- IP20 rated
- 5 year warranty on LED system

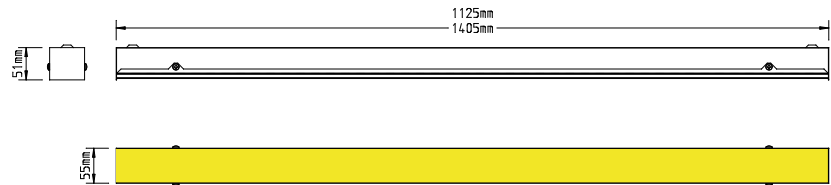

Ambient operating temperature 25°C



PRODUCT CODE		
Product	KES	Kessle
Body Size	11	Length (1125mm)
	14	Length (1405mm)
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output (1125mm)	04	4200 Lumens
	05	4900 Lumens
	06	6100 Lumens
	07	6800 Lumens
	08	7900 Lumens
Output (1405mm)	05	5200 Lumens
	06	6100 Lumens
	08	8100 Lumens
	09	9200 Lumens
	10	9900 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No Sensor
	TS	Thumb Sensor
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency Dali EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
	CL	Clear
	MP	Microprism
	NB	60° (narrow beam)
	MB	90° (medium beam)
Body Colour	W	White
	B	Black
	O	Other/Specified