




## ORGANA

### High Output Linear

MANUFACTURING IN THE  
**UNITED KINGDOM**

- Body constructed from powder coated zintec steel
- Medium and narrow beam lens
- Tridonic or Philips LED modules and drivers
- Exceptional efficacies of up to 156 luminaire lumens per watt
- First branded LED components make this luminaire much more efficient than most Far East alternatives
- Suitable for suspension or trunking mount
- Contemporary designed linear luminaire ideal for retail and industrial aisles
- Optional high transmission opal diffuser ideal for lower mounting heights
- IP20 rated
- 5 year warranty on LED system

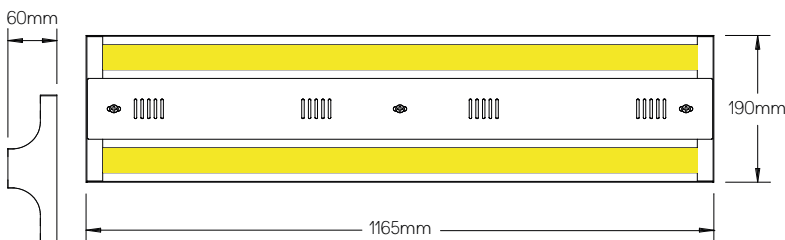

Ambient operating temperature 25°C

#### PRODUCT CODE

<b>Product</b>	<b>ORG</b>	Organa High Output LED
<b>Driver</b>	-	Standard Driver
	D	Dali Driver
	B	DSI Driver
	A	1-10V Driver
	T	Touch Dimming Driver
<b>Output</b> <small>(delivered output based on narrow beam lens)</small>	<b>08</b>	8000lm (delivered 7370 - 49W)
	<b>10</b>	10000lm (delivered 9229 - 65W)
	<b>12</b>	12000lm (delivered 11123 - 71W)
	<b>14</b>	14000lm (delivered 12960 - 85W)
	<b>16</b>	16000lm (delivered 14767 - 99W)
	<b>18</b>	18000lm (delivered 16544 - 114W)
	<b>21</b>	21000lm (delivered 19620 - 129W)
<b>Colour Temperature</b>	<b>30</b>	3000 Kelvin
	-	4000 Kelvin
<b>Sensor</b>	-	No Sensor
	TS	Thumb Sensor (up to 7m)
	PL	PIR Low (up to 3.5m)
	PM	PIR Mid (up to 12m)
	PH	PIR High (up to 16m)
<b>Emergency</b>	-	No Emergency
	EL	3 Hour Emergency
	EX	3 Hour Emergency High Output
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
<b>Diffuser</b>	<b>NB</b>	60° (narrow beam)
	<b>MB</b>	90° (medium beam)
	<b>OP</b>	Opal
	<b>CL</b>	Clear