


## SABRE Light Bar System

MANUFACTURING IN THE  
**UNITED KINGDOM**

- Slimline extruded aluminium profile in black as standard
- Slide in/out flat opal diffuser
- Tridonic LED LLE Flex tape and remote driver
- Designed to thermally manage 24V constant voltage LED tape
- Bespoke/project specific sizes and outputs made to order
- Various powder coating finishes
- Multiple coloured diffusers available
- Edison RGB tape available
- Adjustable surface or suspension mounting options
- IP20 rated
- 5 year warranty on LED system

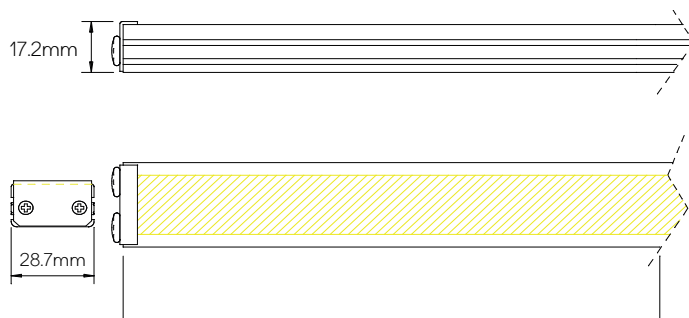

Ambient operating temperature 25°C

PRODUCT CODE		
<b>Product</b>	<b>SAB</b>	Sabre LED Light Bar
<b>Mounting</b>	-	Suspended Mount
	<b>SF</b>	Surface Mount
	<b>AS</b>	Adjustable Surface Mount
<b>Body Size</b>	<b>2F</b>	2ft length (600mm)
	<b>3F</b>	3ft length (860mm)
	<b>4F</b>	4ft length (1200mm)
	<b>5F</b>	5ft length (1500mm)
	<b>6F</b>	6ft length (1800mm)
	<b>8F</b>	8ft length (2400mm)
<b>Driver</b>	-	24V Constant Voltage
	<b>D</b>	24V Constant Voltage Dali
<b>Output (2ft)</b>	<b>00</b>	990 Lumens
	<b>01</b>	1375 Lumens
<b>Output (3ft)</b>	<b>01</b>	1530 Lumens
	<b>02</b>	2125 Lumens
<b>Output (4ft)</b>	<b>02</b>	2070 Lumens
	<b>03</b>	2875 Lumens
<b>Output (5ft)</b>	<b>03</b>	2610 Lumens
	<b>04</b>	3625 Lumens
<b>Output (6ft)</b>	<b>03</b>	3150 Lumens
	<b>04</b>	4375 Lumens
<b>Output (8ft)</b>	<b>04</b>	4230 Lumens
	<b>06</b>	5875 Lumens
<b>Colour Temperature</b>	<b>30</b>	3000 Kelvin
	-	4000 Kelvin
<b>Colour Rendering</b>	-	Ra80
	<b>A</b>	Ra90
<b>Diffuser</b>	-	Opal
	<b>Y</b>	Yellow
	<b>R</b>	Red
	<b>C</b>	Custom
<b>Body Colour</b>	<b>W</b>	White
	<b>B</b>	Black
	<b>S</b>	Silver
	<b>C</b>	Custom