

## SCOUT


### Continuous Linear

MANUFACTURING IN THE  
**UNITED KINGDOM**


- Body constructed from powder coated zintec steel
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Comes complete with GST connectors for through wiring
- Supplied in interconnecting sections with lengths and outputs determined by the individual store requirements
- Supplied with adjustable 3m drop wire suspension kit or optional surface mounting clip
- Tailored output to suit the application with a maximum output of over 10,000lm per metre length
- A range of lens options for different applications
- End caps, joining brackets and variety of optics available to suit all applications
- Designed and built specifically to suit retail environments in either aisle or cross-aisle layouts
- IP20 rated
- 5 year warranty on LED system

PRODUCT CODE	
Product	SC Scout LED
	SCC Scout Compact LED
Mounting	- Suspended Mount
	SF Surface Mount
Body Size	- Lengths to suit individual requirements
	- Standard Driver
Drivers	D Dali Driver
	B DSI Driver
	A 1-10V Driver
	T Touch Dimming Driver
	- Lumen output to suit individual requirements
Output	- Lumen output to suit individual requirements
	30 3000 Kelvin
Colour Temperature	- 4000 Kelvin
	- No Sensor
Sensor	MS Mini Sensor
	TS Thumb Sensor
	PL PIR Low (up to 3.5m)
	PM PIR Mid (up to 12m)
	PH PIR High (up to 16m)
	- No Emergency
Emergency	EL 3 Hour Emergency
	ST Self-Test 3 Hour Emergency
	ED 3 Hour Emergency Dali EM Pro
	-
Body Colour	W White
	B Black
	S Silver
	C Custom
	-
Diffuser	OP Opal
	CL Clear
	NB 60° Narrow Beam
	MB 90° Medium Beam

Standard Body

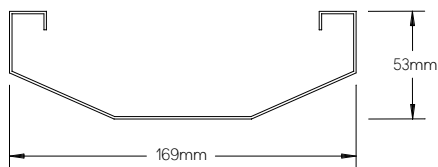

Compact Body

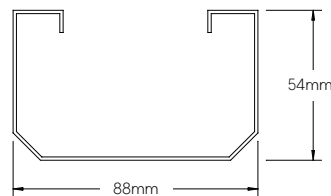

Ambient operating temperature 25°C

