


OTTO Geometrical Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium single piece housing (meaning no on-site assembly)
- High transmission opal diffusers
- Tridonic or Philips LED modules and drivers
- Supplied with adjustable 3m drop wire suspension kit
- Supplied pre-wired with 3m flex
- Available in a variety of geometrical shapes such as pentagon, hexagon, heptagon, decagon etc
- Bespoke/project specific sizes and outputs made to order
- Various powder coating finishes
- IP20 rated
- 5 year warranty on LED system

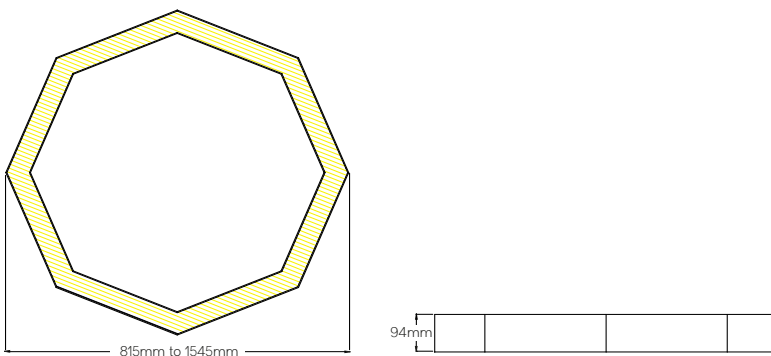

Ambient operating temperature 25°C

PRODUCT CODE		
Product	OTO	Otto LED Pendant
Body Size	08	815mm
	12	1180mm
	15	1545mm
Driver	-	Standard Driver
	D	Dali Driver
	B	DSI Driver
	A	1-10V Driver
	T	Touch Dimming Driver
Output (815mm)	08	8000 Lumens
	11	11000 Lumens
Output (1180mm)	12	12000 Lumens
	16	16000 Lumens
Output (1510mm)	16	16000 Lumens
	22	22000 Lumens
Colour Temperature	30	3000 Kelvin
	-	4000 Kelvin
Colour Rendering	-	Ra80
	A	Ra90
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	C	Custom
	Cable Colour	W
B		Black PVC
G		Grey PVC
T		Transparent
C		Custom