





CONCEALED T

Recessed Concealed T

MANUFACTURING IN THE UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission opal diffuser
- Tridonic LED modules and drivers
- Suitable for most concealed T ceilings
- Adjustable pull up mounting brackets as standard,
- Manufactured brackets available for non standard installations
- Bespoke/project specific sizes and outputs made to order
- Various powder coated finishes
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- IP20 rated
- 5 year warranty on LED system

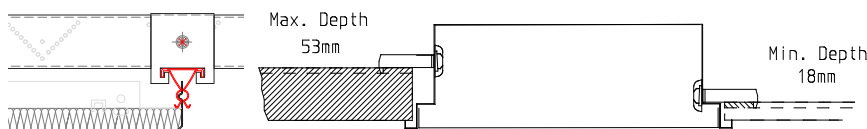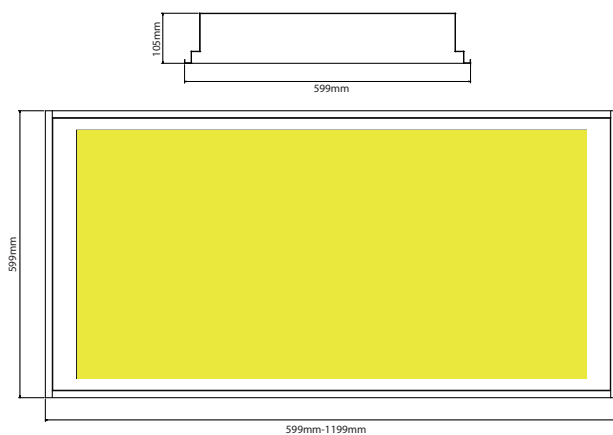

Using standard mounting brackets

PRODUCT CODE			
Product	CT	Concealed T	
Body Size	66	599mm X 599mm	
	126	1199mm X 599mm	
Driver	S	Standard Driver	
	D	Dali Driver	
	W	Wireless Dim	
	A	1-10V Driver	
Output (66)	T	Touch Dimming Driver	
	05	5000 Lumens	
	06	6000 Lumens	
	07	7000 Lumens	
	08	8000 Lumens	
	09	9000 Lumens	
	Output (126)	10	10000 Lumens
		12	12000 Lumens
		14	14000 Lumens
		16	16000 Lumens
18		18000 Lumens	
20		20000 Lumens	
Colour Temperature	3	3000 Kelvin	
	4	4000 Kelvin	
Sensor	-	No Sensor	
	PR	Pir Sensor	
Emergency*	MW	Microwave Sensor	
	-	No Emergency	
Diffuser	EL	3 Hour Emergency Pack	
	ST	Self-Test 3 Hour Emergency	
	ED	3 Hour Emergency Dali EM Pro	
	LM	Lithium Emergency	
Body Colour	OP	Opal	
	MP	Micro Prism	
Body Colour	W	White	
	O	Other/Specified	

* Remote emergency on 66 body size



Ambient operating temperature 25°C - Do not cover back of fitting