


SOLAR Circular Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Steel single piece housing (meaning no on-site assembly)
- High transmission opal diffuser
- Tridonic or Philips LED modules and drivers
- Bespoke outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coating finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

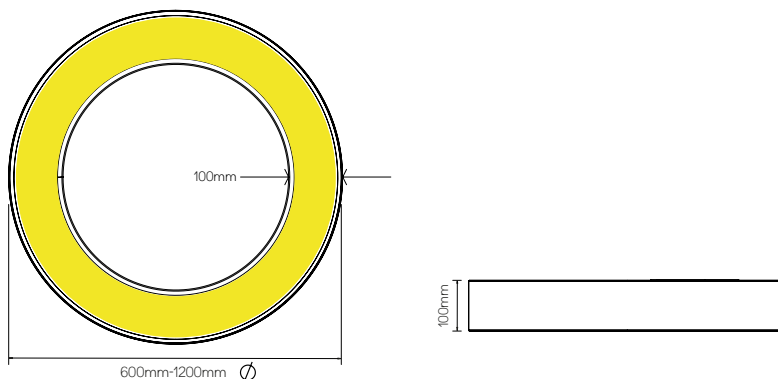

Ambient operating temperature 25°C

PRODUCT CODE

Product	SOL	Solar Pendant
Body Size	06	600mm
	09	900mm
	12	1200mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (600mm)	T	Touch Dimming Driver
	04	3600 Lumens
	06	6400 Lumens
Output (900mm)	10	10100 Lumens
	06	5600 Lumens
	10	9900 Lumens
Output (1200mm)	16	15800 Lumens
	07	7200 Lumens
	12	12700 Lumens
Colour Temperature	20	20400 Lumens
	3	3000 Kelvin
RA (Colour Rendering)	4	4000 Kelvin
	S	Ra80
Emergency	N	Ra90
	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
Body Colour	ED	3 Hour Emergency DALI EM Pro
	W	White
	B	Black
Cable Colour	S	Lithium Emergency
	G	Gold
	O	Other/Specified
	W	White PVC
Emergency	B	Black PVC
	G	Grey PVC
	T	Transparent