


SPACE

Square or Rectangular Pendant

MANUFACTURING IN THE UNITED KINGDOM

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke/project specific sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

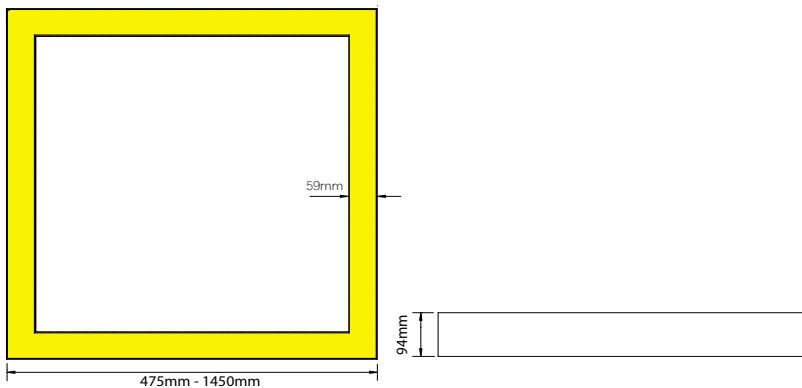

Ambient operating temperature 25°C

PRODUCT CODE	
Product	SPA Space Pendant
Body Size	05 475mm*
	08 755mm
	12 1175mm
	13 1315mm
	15 1455mm
Driver	S Standard Driver
	D Dali Driver
	W Wireless Dim
	A 1-10V Driver
Output (475mm)	T Touch Dimming Driver
	02 2600 Lumens
	05 5200 Lumens
Output (755mm)	08 7500 Lumens
	04 4400 Lumens
	09 8600 Lumens
Output (1175mm)	13 12300 Lumens
	07 7000 Lumens
	14 14000 Lumens
Output (1315mm)	20 20000 Lumens
	08 8000 Lumens
	16 15700 Lumens
Output (1455mm)	23 22600 Lumens
	09 8800 Lumens
	17 17100 Lumens
Colour Temperature	25 24600 Lumens
	3 3000 Kelvin
RA (Colour Rendering)	4 4000 Kelvin
	S Ra80
Emergency	N Ra90
	- No Emergency
	EL 3 Hour Emergency
	ST Self-Test 3 Hour Emergency
	ED 3 Hour Emergency DALI EM Pro
	LM Lithium Emergency
Diffuser	OP Opal
	MP Microprism
Body Colour	W White
	B Black
	S Silver
	G Gold
	O Other/Specified
Cable Colour	W White PVC
	B Black PVC
	G Grey PVC
	T Transparent

*Not available with emergency

