


TETRA Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke/project specific sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

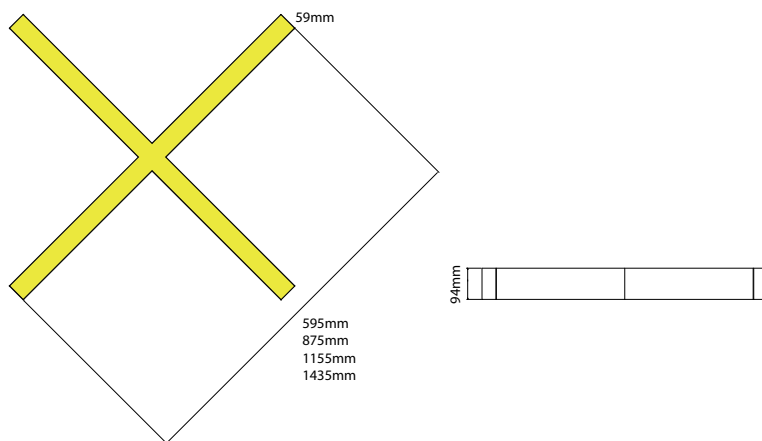

Ambient operating temperature 25°C



PRODUCT CODE

| Product | TET | TET Pendant | |
|--------------------|----------------|------------------------------|-------------|
| Body Size | 06 | 595mm | |
| | 09 | 875mm | |
| | 12 | 1155mm | |
| | 15 | 1435mm | |
| Driver | S | Standard Driver | |
| | D | Dali Driver | |
| | W | Wireless Dim | |
| | A | 1-10V Driver | |
| Output (595mm) | 04 | 4200 Lumens | |
| | 06 | 6100 Lumens | |
| | Output (875mm) | 06 | 6400 Lumens |
| | | 09 | 9300 Lumens |
| Output (1155mm) | 08 | 8400 Lumens | |
| | 12 | 1220 Lumens | |
| Output (1435mm) | 10 | 10700 Lumens | |
| | 15 | 15500 Lumens | |
| Colour Temperature | 3 | 3000 Kelvin | |
| | 4 | 4000 Kelvin | |
| Colour Rendering | S | Ra80 | |
| | N | Ra90 | |
| Emergency | - | No Emergency | |
| | EL | 3 Hour Emergency | |
| | ST | Self-Test 3 Hour Emergency | |
| | ED | 3 Hour Emergency DALI EM Pro | |
| | LM | Lithium Emergency | |
| Diffuser | OP | Opal | |
| | MP | Microprism | |
| Body Colour | W | White | |
| | B | Black | |
| | S | Silver | |
| | G | Gold | |
| | O | Other/Specified | |
| Cable Colour | W | White PVC | |
| | B | Black PVC | |
| | G | Grey PVC | |
| | T | Transparent | |