





## BASE Circular Pendant

MANUFACTURING IN THE  
**UNITED KINGDOM**

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic LED modules and drivers
- A sleek minimalist design suitable for retail and/or office feature lighting
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

### PRODUCT CODE

<b>Product</b>	<b>BAS</b>	Base Pendant
<b>Body Size</b>	<b>06</b>	565mm
	<b>09</b>	850mm
<b>Driver</b>	<b>S</b>	Standard Driver
	<b>D</b>	Dali Driver
	<b>W</b>	Wireless Dim
	<b>A</b>	1-10V Driver
<b>Output</b>	<b>T</b>	Touch Dimming Driver
	<b>06</b>	6000 Lumens (565mm)
	<b>09</b>	9000 Lumens (850mm)
<b>Colour Temperature</b>	<b>3</b>	3000 Kelvin
	<b>4</b>	4000 Kelvin
<b>Emergency</b>	<b>-</b>	No Emergency
	<b>EL</b>	3 Hour Emergency
	<b>ST</b>	Self-Test 3 Hour Emergency
	<b>ED</b>	3 Hour Emergency Dali EM Pro
	<b>LM</b>	Lithium Emergency
<b>Diffuser</b>	<b>OP</b>	Opal
	<b>MP</b>	Microprism
<b>Body Colour</b>	<b>W</b>	White
	<b>B</b>	Black
	<b>S</b>	Silver
	<b>G</b>	Gold
	<b>O</b>	Other/Specified
<b>Cable Colour</b>	<b>W</b>	White PVC
	<b>B</b>	Black PVC
	<b>G</b>	Grey PVC
	<b>T</b>	Transparent

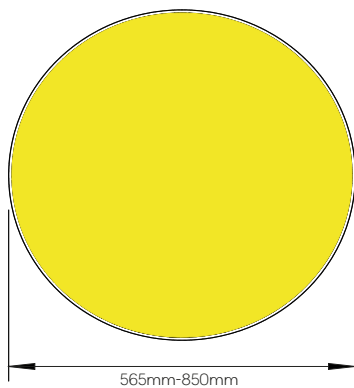

Ambient operating temperature 25°C

