


CORNICE Corner Mounted

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission clear or opal diffusers
- Tridonic or Philips LED modules and drivers
- Suitable for areas where controlled light and sealed unit are required
- Various powder coated finishes
- Moisture resistant, ingress protection of up to IP65 is offered
- High colour rendering CRI>80
- IP65 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

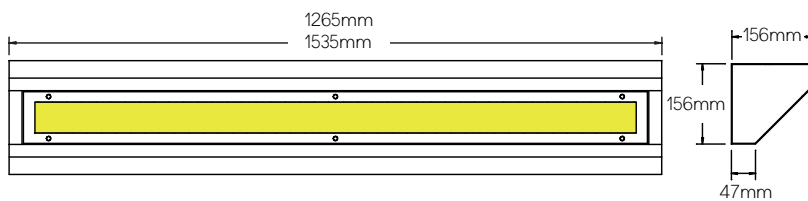

Ambient operating temperature 25°C

| PRODUCT CODE | | |
|---------------------------|------------|------------------------------|
| Product | COR | Cornice |
| Body Size | 13 | Length (1265mm) |
| | 15 | Length (1535mm) |
| Driver | S | Standard Driver |
| | D | Dali Driver |
| | W | Wireless Dim |
| | A | 1-10V Driver |
| | T | Touch Dimming Driver |
| Output (13) | 04 | 4400 Lumens |
| | 06 | 6000 Lumens |
| | 07 | 7000 Lumens |
| | 08 | 8000 Lumens |
| Output (15) | 06 | 5500 Lumens |
| | 08 | 7500 Lumens |
| | 09 | 8750 Lumens |
| | 10 | 10000 Lumens |
| Colour Temperature | 3 | 3000 Kelvin |
| | 4 | 4000 Kelvin |
| Emergency | - | No Emergency |
| | EL | 3 Hour Emergency |
| | ST | Self-Test 3 Hour Emergency |
| | ED | 3 Hour Emergency DALI EM Pro |
| | LM | Lithium Emergency |
| Body Colour | W | White |
| | B | Black |
| | S | Silver |
| Diffuser | CL | Clear |
| | OP | Opal |

